

Product Catalogue



**Stick-it
Seal-it
Fill-it**

Fuller-it

Quality products
designed for professional
applications.

We've built our business in the construction industry,
providing Aussie tradies with high-performance adhesives,
sealants, silicones, fillers and foams.

Contents



<h1>Adhesives</h1> <h2>100s</h2> <table><tr><td colspan="2">Construction</td><td>Page</td></tr><tr><td>100</td><td>Max Bond™ Construction</td><td>10</td></tr><tr><td>103</td><td>Fulaprene</td><td>11</td></tr><tr><td>120</td><td>Max Bond™ Fast Grip</td><td>12</td></tr><tr><td>140</td><td>Max Bond™ Rapid Cure</td><td>13</td></tr></table>			Construction		Page	100	Max Bond™ Construction	10	103	Fulaprene	11	120	Max Bond™ Fast Grip	12	140	Max Bond™ Rapid Cure	13	<h1>Fillers</h1> <h2>300s</h2> <table><tr><td colspan="2">Fillers</td><td>Page</td></tr><tr><td>320</td><td>Building Filler</td><td>20</td></tr><tr><td>330</td><td>Max Fill™ Gap Filler</td><td>21</td></tr></table> <table><tr><td colspan="2">Foam</td><td>Page</td></tr><tr><td>350</td><td>Max Fill™ Expanding Foam</td><td>22</td></tr><tr><td>351</td><td>Fula Foam™ Pro Foam</td><td>22</td></tr></table> <table><tr><td colspan="2">Powders</td><td>Page</td></tr><tr><td>390</td><td>Trademate™ Interior Powder</td><td>23</td></tr><tr><td>391</td><td>Trademate™ Exterior Powder</td><td>23</td></tr></table>			Fillers		Page	320	Building Filler	20	330	Max Fill™ Gap Filler	21	Foam		Page	350	Max Fill™ Expanding Foam	22	351	Fula Foam™ Pro Foam	22	Powders		Page	390	Trademate™ Interior Powder	23	391	Trademate™ Exterior Powder	23	<h1>Sealants</h1> <h2>400s</h2> <table><tr><td colspan="2">Sealant</td><td>Page</td></tr><tr><td>400</td><td>Max Seal™ Clear Sealant</td><td>26</td></tr><tr><td>410</td><td>Ultra Clear™</td><td>27</td></tr><tr><td>420</td><td>Fulaseal™</td><td>28</td></tr></table> <h2>500s</h2> <table><tr><td colspan="2">Sealant</td><td>Page</td></tr><tr><td>560</td><td>Super Seal HPR25™</td><td>30</td></tr><tr><td>561</td><td>Max Fix™ MS Adhesive Sealant</td><td>31</td></tr><tr><td>562</td><td>Super Seal HPR50™</td><td>32</td></tr><tr><td>570</td><td>Liquid Glass</td><td>33</td></tr></table>			Sealant		Page	400	Max Seal™ Clear Sealant	26	410	Ultra Clear™	27	420	Fulaseal™	28	Sealant		Page	560	Super Seal HPR25™	30	561	Max Fix™ MS Adhesive Sealant	31	562	Super Seal HPR50™	32	570	Liquid Glass	33	<h1>Silicones</h1> <h2>600s</h2> <table><tr><td colspan="2">Silicone by Feature</td><td>Page</td></tr><tr><td>620</td><td>High Performance Glazing Silicone</td><td>36</td></tr><tr><td></td><td>Premium Grade Silicone</td><td>37</td></tr><tr><td></td><td>RTV Adhesive and Silicone</td><td>38</td></tr><tr><td></td><td>RTV Heat Resistant Silicone</td><td>39</td></tr><tr><td>660</td><td>High Performance Silicone</td><td>40</td></tr></table> <h2>700s</h2> <table><tr><td colspan="2">Silicone by Application</td><td>Page</td></tr><tr><td>700</td><td>Roof & Gutter Silicone</td><td>41</td></tr><tr><td>710</td><td>Glass Silicone</td><td>42</td></tr><tr><td>720</td><td>Paintable Silicone</td><td>43</td></tr><tr><td></td><td>Brick & Concrete Silicone</td><td>44</td></tr><tr><td>740</td><td>Bathroom & Kitchen Silicone</td><td>45</td></tr><tr><td>750</td><td>Multi Purpose Silicone</td><td>46</td></tr><tr><td>760</td><td>Glazing Silicone</td><td>47</td></tr><tr><td>770</td><td>Sanitary Silicone</td><td>48</td></tr><tr><td>780</td><td>Plumbers Silicone</td><td>50</td></tr><tr><td>790</td><td>Mirror & Metal Silicone</td><td>51</td></tr></table>			Silicone by Feature		Page	620	High Performance Glazing Silicone	36		Premium Grade Silicone	37		RTV Adhesive and Silicone	38		RTV Heat Resistant Silicone	39	660	High Performance Silicone	40	Silicone by Application		Page	700	Roof & Gutter Silicone	41	710	Glass Silicone	42	720	Paintable Silicone	43		Brick & Concrete Silicone	44	740	Bathroom & Kitchen Silicone	45	750	Multi Purpose Silicone	46	760	Glazing Silicone	47	770	Sanitary Silicone	48	780	Plumbers Silicone	50	790	Mirror & Metal Silicone	51	<h1>Flooring</h1> <h2>800s</h2> <table><tr><td colspan="2">Timber</td><td>Page</td></tr><tr><td>850</td><td>Floor Bond XMS™</td><td>54</td></tr><tr><td>860</td><td>Floor Seal Epoxy™ Part A</td><td>55</td></tr><tr><td></td><td>Floor Seal Epoxy™ Part B</td><td>55</td></tr></table> <h2>900s</h2> <table><tr><td colspan="2">Miscellaneous</td><td>Page</td></tr><tr><td>920</td><td>Easy Tile™</td><td>56</td></tr><tr><td></td><td>WPM 300™ Water Proofing</td><td>57</td></tr></table>			Timber		Page	850	Floor Bond XMS™	54	860	Floor Seal Epoxy™ Part A	55		Floor Seal Epoxy™ Part B	55	Miscellaneous		Page	920	Easy Tile™	56		WPM 300™ Water Proofing	57	<h1>Firerated</h1> <h2>1000s</h2> <table><tr><td colspan="2">Sealant</td><td>Page</td></tr><tr><td>1020</td><td>Firesound™ Fire Rated Sealant</td><td>60</td></tr></table> <table><tr><td colspan="2">Foam</td><td>Page</td></tr><tr><td>1050</td><td>Fula Foam™ Fire Resistant Expanding Foam</td><td>61</td></tr></table>			Sealant		Page	1020	Firesound™ Fire Rated Sealant	60	Foam		Page	1050	Fula Foam™ Fire Resistant Expanding Foam	61
Construction		Page																																																																																																																																																																								
100	Max Bond™ Construction	10																																																																																																																																																																								
103	Fulaprene	11																																																																																																																																																																								
120	Max Bond™ Fast Grip	12																																																																																																																																																																								
140	Max Bond™ Rapid Cure	13																																																																																																																																																																								
Fillers		Page																																																																																																																																																																								
320	Building Filler	20																																																																																																																																																																								
330	Max Fill™ Gap Filler	21																																																																																																																																																																								
Foam		Page																																																																																																																																																																								
350	Max Fill™ Expanding Foam	22																																																																																																																																																																								
351	Fula Foam™ Pro Foam	22																																																																																																																																																																								
Powders		Page																																																																																																																																																																								
390	Trademate™ Interior Powder	23																																																																																																																																																																								
391	Trademate™ Exterior Powder	23																																																																																																																																																																								
Sealant		Page																																																																																																																																																																								
400	Max Seal™ Clear Sealant	26																																																																																																																																																																								
410	Ultra Clear™	27																																																																																																																																																																								
420	Fulaseal™	28																																																																																																																																																																								
Sealant		Page																																																																																																																																																																								
560	Super Seal HPR25™	30																																																																																																																																																																								
561	Max Fix™ MS Adhesive Sealant	31																																																																																																																																																																								
562	Super Seal HPR50™	32																																																																																																																																																																								
570	Liquid Glass	33																																																																																																																																																																								
Silicone by Feature		Page																																																																																																																																																																								
620	High Performance Glazing Silicone	36																																																																																																																																																																								
	Premium Grade Silicone	37																																																																																																																																																																								
	RTV Adhesive and Silicone	38																																																																																																																																																																								
	RTV Heat Resistant Silicone	39																																																																																																																																																																								
660	High Performance Silicone	40																																																																																																																																																																								
Silicone by Application		Page																																																																																																																																																																								
700	Roof & Gutter Silicone	41																																																																																																																																																																								
710	Glass Silicone	42																																																																																																																																																																								
720	Paintable Silicone	43																																																																																																																																																																								
	Brick & Concrete Silicone	44																																																																																																																																																																								
740	Bathroom & Kitchen Silicone	45																																																																																																																																																																								
750	Multi Purpose Silicone	46																																																																																																																																																																								
760	Glazing Silicone	47																																																																																																																																																																								
770	Sanitary Silicone	48																																																																																																																																																																								
780	Plumbers Silicone	50																																																																																																																																																																								
790	Mirror & Metal Silicone	51																																																																																																																																																																								
Timber		Page																																																																																																																																																																								
850	Floor Bond XMS™	54																																																																																																																																																																								
860	Floor Seal Epoxy™ Part A	55																																																																																																																																																																								
	Floor Seal Epoxy™ Part B	55																																																																																																																																																																								
Miscellaneous		Page																																																																																																																																																																								
920	Easy Tile™	56																																																																																																																																																																								
	WPM 300™ Water Proofing	57																																																																																																																																																																								
Sealant		Page																																																																																																																																																																								
1020	Firesound™ Fire Rated Sealant	60																																																																																																																																																																								
Foam		Page																																																																																																																																																																								
1050	Fula Foam™ Fire Resistant Expanding Foam	61																																																																																																																																																																								
<h1>Multi</h1> <h2>1100s</h2> <table><tr><td colspan="2">Toolbox</td><td>Page</td></tr><tr><td>1150</td><td>Tool Box™</td><td>63</td></tr></table> <table><tr><td colspan="2">Caulk in Colours</td><td>64</td></tr></table>			Toolbox		Page	1150	Tool Box™	63	Caulk in Colours		64	<table><tr><td colspan="2">Comparison</td><td>Page</td></tr><tr><td colspan="2">Trade Selection Chart</td><td>102</td></tr></table>			Comparison		Page	Trade Selection Chart		102																																																																																																																																																						
Toolbox		Page																																																																																																																																																																								
1150	Tool Box™	63																																																																																																																																																																								
Caulk in Colours		64																																																																																																																																																																								
Comparison		Page																																																																																																																																																																								
Trade Selection Chart		102																																																																																																																																																																								

DIY

The easy way to choose the right product for your project.

We've designed a DIY range which makes it easy for you to select the right product for your project whether it be for sticking, sealing or filling.




Contents



Stick-it	Page
SubFlooring Adhesive	70
Wall & Ceiling Adhesive	71
Bathroom & Kitchen Adhesive	72
Multi Purpose Adhesive	74
Multi Purpose FAST CURE Adhesive	75
Outdoor Adhesive	76
Heavy Duty Adhesive	77

Seal-it	Page
Bathroom & Kitchen Sealant	80
Window & Glass Sealant	81
Roof & Gutter Sealant	82
Outdoor Sealant	84
Multi Purpose Sealant	85
Heavy Duty Sealant	86
All in 1 Adhesive / Sealant / Filler	88

Fill-it	Page
Gaps - Indoor Filler	92
Gaps - Outdoor Filler	93
Small Crack & Holes Filler	94
Large Crack & Holes Filler	95

Accessories	Page
All the tools you need to get the job done right.	96
	
Recommended Joint Configurations	98
DIY Selection Chart	100



Trade

Adhesives

Durable adhesives, proven to work on Australian building sites just as hard as you do.

100s Construction Adhesives

100
Max Bond™
Page 10



103
Fulaprene
Page 11



120
Max Bond™ Fast Grip
Page 12



140
Max Bond™ Rapid Cure
Page 13



200s Contact Adhesives

201
Spray Bond™ Permanent
Page 14



202
Spray Bond™ Removable
Page 14



203
Rapid Grip™ - Liquid
Page 15



204
Rapid Grip™ - Gel
Page 15



Stud Adhesives

220
ROCOR® Stud Adhesive
Page 16



230
Max Bond™ PVA Adhesive
Page 16



Other Adhesives

248
Max Pro Cleaner™
Page 17



249
Max Bond™ Pro Gun Adhesive
Page 17











Max Bond™ Construction Adhesive

Max Bond™ Construction Adhesive is a synthetic, rubber based adhesive designed primarily for the installation of flooring and wall panels. Max Bond™ Construction Adhesive is also ideal for bonding most common construction materials such as metal, timber and concrete.

Key Benefits	Uses
<div><div>✔</div>Bridges small gaps, effective when used on uneven surfaces</div> <div><div>✔</div>Reduced squeaking associated with nail ride in floors</div> <div><div>✔</div>Multi purpose</div> <div><div>✔</div>Repositionable for up to 20 minutes after application</div> <div><div>✔</div>Water resistant</div> <div><div>✔</div>High bond strength</div>	<div><div>✔</div>Installing particle board, fibre cement, plasterboard, plywood and strip flooring to joists</div> <div><div>✔</div>Bonding fibre cement sheet, plaster board and wall panelling to timber and metal studs</div> <div><div>✔</div>High bond strength and heat resistance</div> <div><div>✔</div>Skirting boards, architraves and trims to walls</div> <div><div>✔</div>Mirrors to vertical walls not overhead</div> <div><div>✔</div>Replacing loose tiles on walls (not recommended for floor tiles)</div> <div><div>✔</div>Suitable for fixing polystyrene wall panels, provided directions are followed</div>

Specifications
Cured state Rigid - Minimal flexibility
Typical film thickness N/A - applied in beads up to 12mm in diameter
Skin time 2 - 5 minutes
Cure time Full cure after 7 days (25°C, 50% RH)
Area Interior / Exterior
Product Chemistry Solvent based rubber
Refer to TDS for additional technical information.

Available products		colour	carton qty
	Max Bond™ 320g cartridge Resource code: 6004134011	 tan	20
	Max Bond™ 900g cartridge Resource code: 6004134049	 tan	12
	Max Bond™ 600mL sausage Resource code: 6004134133	 tan	15

Compatible Substrates
<div><div>✔</div>Concrete</div> <div><div>✔</div>Cement sheeting</div> <div><div>✔</div>Metal</div> <div><div>✔</div>Plasterboard</div> <div><div>✔</div>Timber</div> <div><div>✔</div>Fibreglass</div> <div><div>✔</div>Plywood</div> <div><div>✔</div>Particleboard</div> <div><div>✔</div>Ceramic</div>





Fulaprene Adhesive Sealant

Fulaprene 303™ is a neoprene based adhesive sealant ideal for use in sealing lap joints in sheet metalwork. Fulaprene 303™ will adhere to a wide range of substrates and can be used in numerous common construction applications.

Key Benefits	Uses
<div><div>✔</div>Seals water and airtight</div> <div><div>✔</div>Paintable</div> <div><div>✔</div>Interior / Exterior</div> <div><div>✔</div>Resistant to salt and chlorinated water</div> <div><div>✔</div>Heat resistant to 80°C</div> <div><div>✔</div>UV resistant</div> <div><div>✔</div>Strong adhesion to a wide range of substrates</div>	<div><div>✔</div>Sealing lap joints in box guttering</div> <div><div>✔</div>Sealing air conditioning ducts</div> <div><div>✔</div>Adhesive for fixing wall panels to studs, floor boards to joists</div> <div><div>✔</div>Re-fixing loose ceramic tiles outside pools and in showers</div> <div><div>✔</div>Sealing roof flashing</div>

Specifications
Cured state Rigid - Minimal flexibility
Typical film thickness Gaps up to 2mm - applied in beads up to 10mm in diameter
Skin time 2 - 5 minutes
Cure time Full cure after 7 days (25°C, 50% RH)
Area Interior / Exterior
Product Chemistry Solvent based rubber
Refer to TDS for additional technical information.

Available products		colour	carton qty
	Fulaprene 303™ 300g cartridge Resource code: 6003894033		grey 20

Compatible Substrates
<div><div>✔</div>Aluminium</div> <div><div>✔</div>Masonry</div> <div><div>✔</div>Ceramic</div> <div><div>✔</div>Brick</div> <div><div>✔</div>Glass</div> <div><div>✔</div>Fibreglass</div> <div><div>✔</div>Steel</div> <div><div>✔</div>Galvanized iron</div> <div><div>✔</div>Timber</div> <div><div>✔</div>Some plastics and rubber</div> <div><div>✔</div>Plywood</div> <div><div>✔</div>Other common materials</div>









Max Bond™ Fast Grip Adhesive

Max Bond™ Fast Grip is a water based, premium grade, multi purpose construction adhesive that is easy to use and provides a strong initial grab. Fast Grip reduces squeaks in the flooring system and cures to give high bond strength. Fast Grip is ideal for bonding parquetry to floors and subfloors, and for bonding timber strip flooring that will be sanded and finished after installation.

Key Benefits	Uses
<ul style="list-style-type: none">✓ Water based, high bond strength and heat resistance when cured✓ Versatile✓ Fast initial grab✓ Low VOC✓ Low odour✓ Meets AS 2329, bridges gaps up to 5mm✓ Non-flammable and solvent free✓ Reduces squeaks in floors	<ul style="list-style-type: none">✓ Bonding panelling to framing e.g. cement sheet, plywood, plasterboard✓ Bonding subfloors to joists e.g. particleboard✓ Bonding strip flooring and parquetry to subfloor and concrete slabs

Specifications
Cured state Rigid - Slightly flexible
Typical film thickness N/A - applied in beads up to 12mm in diameter
Skin time 20 minutes
Cure time 90% of full bond strength in 24 hours, depending on conditions
Area Interior / Exterior
Product Chemistry Acrylic water based
Refer to TDS for additional technical information.

Available products	colour	carton qty
 Max Bond™ Fast Grip 420g cartridge Resource code: 6020684010	 pale brown	20
 Max Bond™ Fast Grip 600mL sausage Resource code: 4145534133	 pale brown	5
 Max Bond™ Fast Grip 1.5kg concorde Resource code: 6025984134	 white	10

Compatible Substrates
<ul style="list-style-type: none">✓ Timber✓ Concrete✓ Steel✓ Fibre cement✓ Plywood✓ Particleboard





Max Bond™ Rapid Cure

Max Bond™ Rapid Cure is a rigid/hard set polyurethane for where strong, stress resistant bonding is required. Waterproof to D4 classification makes it suitable for exterior applications. Max Bond™ Rapid Cure needs only one hour clamping times in most conditions.

Key Benefits	Uses
<ul style="list-style-type: none">✓ Rapid cure – one hour clamping time✓ Water resistance – interior and exterior (D4 class)✓ Bonds to most substrates✓ Will not allow joints to move or flex✓ Foams slightly if not clamped, bond strength significantly improves when clamped	<ul style="list-style-type: none">✓ Joinery and cabinet making where rigid bonding is required✓ Pergola and decking construction✓ Bonding carpet grip strips to floors and subfloors – especially to concrete when unable to nail✓ Bonding where fast cure is required✓ Green star building suitable (solvent free)

Specifications
Cured state Rigid
Typical film thickness N/A - applied in beads up to 12mm in diameter
Skin time 5 minutes
Cure time 1 hour clamping time, full cure 7 days (25°C, 50% RH)
Area Interior / Exterior
Product Chemistry Polyurethane
Refer to TDS for additional technical information.

Available products	colour	carton qty
 Max Bond™ Rapid Cure 320g cartridge Resource code: 7060944055	 translucent	12

Compatible Substrates
<ul style="list-style-type: none">✓ Timber✓ Concrete✓ Steel✓ Fibre cement✓ Plywood✓ Particleboard

Contact Adhesive

201

Spray Bond™ Permanent Spray Adhesive

Spray Bond™ Permanent Spray Adhesive is a multi purpose spray glue for home, school and art and craft uses. Providing long lasting adhesion on many lightweight materials.





- Key Benefits

 - ✓ Easy to spray application
 - ✓ Fast drying
 - ✓ Non staining; dries clear
 - ✓ Multi purpose
 - ✓ Can be used on rigid and flexible materials
 - ✓ For permanent bonding
- Uses

 - ✓ Mounting prints and photos
 - ✓ Art design and displays
 - ✓ Laminating and bonding craft materials such as fabric and paper

Specifications	Compatible Substrates
Cured state Flexible	✓ Fabric
Typical film thickness <0.5mm	✓ Paper
Skin time 5 - 10 minutes	✓ Cardboard
Cure time Approx. 2 hours	✓ Glitter
Area Interior	✓ Felt
Product Chemistry Chloroprene rubber based solvent	✓ Leather
	✓ Many rubber and plastic films (pre-test before use)
Refer to TDS for additional technical information.	

Available Products		
	colour	carton qty
	Spray Bond™ Permanent 350g can Resource code: 6004544056	 translucent 12

Contact Adhesive

202

Spray Bond™ Removable Spray Adhesive

Spray Bond™ Removable Spray Adhesive is a multi purpose spray glue for home, school, art and craft uses. Providing temporary adhesion on many lightweight materials.





- Key Benefits

 - ✓ For removable and re-usable bonding
 - ✓ Won't wrinkle or distort materials
 - ✓ Easy to use spray application
 - ✓ Multi purpose
 - ✓ Quick drying time
- Uses

 - ✓ Ideal for temporary bonding
 - ✓ Mounting photos and prints
 - ✓ Art design and displays
 - ✓ Laminating and bonding materials such as fabric and paper where removability is required

Specifications	Compatible Substrates
Cured state Flexible	✓ Fabric
Typical film thickness <0.5mm	✓ Paper
Skin time 5 - 10 minutes	✓ Cardboard
Cure time Approx. 2 hours	✓ Glitter
Area Interior	✓ Felt
Product Chemistry Chloroprene rubber based solvent	✓ Leather
	✓ Many rubber and plastic films (pre-test before use)
Refer to TDS for additional technical information.	

Available Products		
	colour	carton qty
	Spray Bond™ Removable 150g can Resource code: 6004544203	 translucent 6

Contact Adhesive

203

Rapid Grip™ Contact Adhesive - Liquid

Rapid Grip™ Contact Adhesive Liquid is a low viscosity, general purpose adhesive.







- Key Benefits

 - ✓ Spreads easily and uniformly
 - ✓ Strong bond
 - ✓ Fast bonding action
 - ✓ Heat and water resistant
 - ✓ Can be applied using brush spreader or roller
- Uses

 - ✓ Bonding melamine to particleboard, plywood, MDF board and masonite
 - ✓ Laminating a variety of materials
 - ✓ General repairs

Specifications	Compatible Substrates
Cured state Flexible	✓ Fabric
Typical film thickness 1mm	✓ Metal
Skin time 15 minutes	✓ Glass
Cure time 24 hour	✓ MDF
Area Interior / Exterior	✓ Linoleum
Product Chemistry Solvent based rubber	✓ Melamine board
	✓ Timber
	✓ Masonite
	✓ Particleboard
	✓ Polyurethane foam
	✓ Cork
Refer to TDS for additional technical information.	

Available Products		
	colour	carton qty
	Rapid Grip™ Liquid 1L can Resource code: 6004214106	 amber 8
	Rapid Grip™ Liquid 4L can Resource code: 6004214020	 amber 1

Contact Adhesive

204

Rapid Grip™ Contact Adhesive - Gel

Rapid Grip™ Contact Adhesive Gel is specifically formulated for use in vertical and overhead situations.







- Key Benefits

 - ✓ Will not drip or spill - ideal for overhead applications
 - ✓ Strong bond
 - ✓ Up to 3 minutes slip time for perfect positioning
 - ✓ Fast bonding action
 - ✓ Excellent for porous surfaces
 - ✓ Heat and water resistant
- Uses

 - ✓ Bonding melamine to particleboard, plywood, MDF board and masonite
 - ✓ Laminating a variety of materials

Specifications	Compatible Substrates
Cured state Flexible	✓ Fabric
Typical film thickness 1mm (Coverage 5m²/L using a 1mm spreader)	✓ Metal
Skin time 15 minutes	✓ Glass
Cure time 24 hour	✓ MDF
Area Interior / Exterior	✓ Linoleum
Product Chemistry Solvent based rubber	✓ Melamine board
	✓ Timber
	✓ Masonite
	✓ Particleboard
	✓ Polyurethane foam
	✓ Cork
Refer to TDS for additional technical information.	

Available Products		
	colour	carton qty
	Rapid Grip™ Gel 1L can Resource code: 6008344106	 yellow 8
	Rapid Grip™ Gel 4L can Resource code: 6008344020	 yellow 1

Stud Adhesive

220



ROCOR® Trade Stud Adhesive

ROCOR® Trade Stud Adhesive is a quality stud adhesive that meets the requirements of AS2753-1985 for bonding plasterboard to metal internal framing or internal wooden studs.



Key Benefits	Uses
<div><div>✓</div>Complies with AS2753-1985: adhesives- mastic-for bonding gypsum plaster lining to wood and metal framing members</div>	<div><div>✓</div>Bonding plasterboard to timber or metal building framing</div> <div><div>✓</div>Suitable for pine softwood framing</div> <div><div>✓</div>Suitable for hardwood framing</div> <div><div>✓</div>Suitable for timber framing (H1, H2, H2F)</div>

Specifications	Compatible Substrates
<div><div>Cured state Rigid - Slightly flexible</div><div>Typical film thickness N/A - applied in blobs</div><div>Skin time 20 minutes</div><div>Cure time 80% in 24 hrs, full cure in 7 days</div><div>Area Interior only</div><div>Product Chemistry Acrylic</div></div> <div>Refer to TDS for additional technical information.</div>	<div><div>✓</div>Timber framing</div> <div><div>✓</div>Metal framing</div> <div><div>✓</div>Plasterboard</div> <div><div>✓</div>EPS polystyrene</div> <div><div>✓</div>Particleboard</div> <div><div>✓</div>Plywood</div>

Available Products		
	colour	carton qty
	ROCOR® Stud Adhesive 5.2kg pail Resource code: 6025061520	 aqua 1

PVA Adhesive

230









Max Bond™ PVA Adhesive

Max Bond™ PVA is a professional quality, cross linking water resistant adhesive that resists soaking into end grain. The cross linking formulation assists in creating a stronger bond and reduces the chance of substrates separating over time under stress.



Key Benefits	Uses
<ul style="list-style-type: none">✓ Cross linking✓ Fast setting – dries clear✓ D3 standard water resistance✓ Sandable✓ High solids – high strength✓ Water clean up	<ul style="list-style-type: none">✓ Joinery, cabinet furniture making✓ Laminating and veneering✓ Flooring✓ Craft work

Specifications	Compatible Substrates
<div><div>Cured state Slightly flexible</div><div>Typical film thickness N/A</div><div>Skin time 30 minutes (22°C, 60% RH)</div><div>Cure time 60 minutes (22°C, 60% RH)</div><div>Area Interior/exterior</div><div>Product Chemistry PVA</div><div>Refer to TDS for additional technical information.</div></div>	<div><div>✓</div>Wood</div> <div><div>✓</div>MDF</div> <div><div>✓</div>Plywood</div> <div><div>✓</div>Particleboard</div>

Available Products		
	colour	carton qty
	Max Bond™ PVA Adhesive 250mL bottle Resource Code: 6004924019	 white (dries clear) 15
	Max Bond™ PVA Adhesive 500mL bottle Resource Code: 6004924021	 white (dries clear) 12
	Max Bond™ PVA Adhesive 1L bottle Resource Code: 600492018	 white (dries clear) 6
	Max Bond™ PVA Adhesive 5L bottle Resource Code: 6004924022	 white (dries clear) 1

Contact Adhesive

248



Max Pro Cleaner™

Max Pro Cleaner™ is a solvent based cleaner for cleaning uncured polyurethane from applicator guns or other surfaces. The cleaner can be used to clean the gun when either Max Bond™ Pro or Fula Foam™ Pro have been used.



Key Benefits	Uses
<ul style="list-style-type: none">✓ Does not contain CFC's or H-CFC's✓ Rapid cleaning of uncured polyurethane✓ Applicator gun and general surfaces cleaner in one	<ul style="list-style-type: none">✓ Clean up of excess foam or foam adhesive from tool and work surfaces✓ Cleaning of foam applicator gun by screwing the can into the top of the gun✓ For the cleaning of general surfaces, attach the red nozzle to the can

Specifications	Compatible Substrates
<div><div>Cured state N/A</div><div>Typical film thickness N/A</div><div>Skin time N/A</div><div>Cure time N/A</div><div>Area N/A</div><div>Product Chemistry Solvent</div></div> <div>Refer to TDS for additional technical information.</div>	N/A

Available Products		
	colour	carton qty
	Max Pro Cleaner™ 340g can Resource code: 7319624110	 colourless 12

Contact Adhesive

249



Max Bond™ Pro Gun Adhesive

Max Bond™ Pro Gun Adhesive is a ready-to-use polyurethane foam adhesive designed for use to bond timber subfloors to timber or metal joists. As the adhesive foam is applied with a gun applicator, the rate of application can be controlled and the canister can be sealed and re-used over a period of weeks.



Key Benefits	Uses
<ul style="list-style-type: none">✓ High yield/equivalent to 30 x 300g cartridges of construction adhesive✓ Superior bonding strength✓ Long open time✓ Ozone safe✓ Reduced waste✓ Can be sealed and re-used✓ Suited to wet, dry or green timber✓ Designed to prevent squeaks and nail pop	<ul style="list-style-type: none">✓ Bonding of subfloor to timber joists✓ Bonding of panelling to timber or metal studs✓ Refer to page 96 for Application Guns

Specifications	Compatible Substrates
<div><div>Cured state Rigid – minimal flexibility</div><div>Typical film thickness N/A - Applied in beads up to 12mm</div><div>Skin time 20 - 30 minutes</div><div>Cure time 80% in 3 hrs, full cure in 24 hours</div><div>Area Interior only</div><div>Product Chemistry Polyurethane</div></div> <div>Refer to TDS for additional technical information.</div>	<div><div>✓</div>Timber joists</div> <div><div>✓</div>Timber</div> <div><div>✓</div>Metal joists</div> <div><div>✓</div>Plywood</div> <div><div>✓</div>Concrete joists</div> <div><div>✓</div>Particleboard</div> <div><div>✓</div>Fibre cement</div>

Available Products		
	colour	carton qty
	Max Bond™ Pro 680g can Resource code: 7319644238	 yellow 12

Fillers

Gaps, cracks and holes found when building, need a fast professional result the first time. Use our range to make your project have a high quality finish.

300s Fillers

Building Filler

320

**Building Filler
Two Part Filler**

Page 20



Gap Filler

330

**Max Fill™
Gap Filler**

Page 21



Expanding Foam Filler

350

**Max Fill™
Expanding Foam**


Page 22



351

**Fula Foam™
Pro Gun Applied
Foam**

Page 22



Powder Filler

390

**Trademate™
Interior
Powder Filler**

Page 23




391

**Trademate™
Exterior
Powder Filler**

Page 23



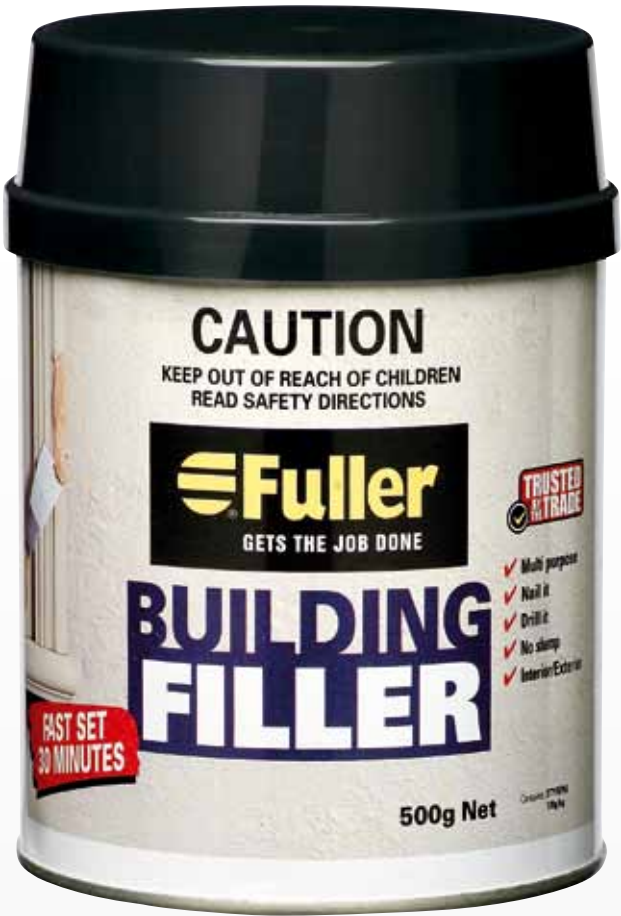

Building Filler Two Part Filler

Building Filler is a two part polyester putty, designed to fill gaps and holes where movement is not expected. Building Filler is designed for use by builders and tradespeople for a professional result fast.







Key Benefits

- ✓ Fills gaps, cracks and holes in most common building materials
- ✓ Interior / Exterior
- ✓ Sets rock hard, fast
- ✓ Will not shrink or slump
- ✓ Easy to sand and paint

Uses

- ✓ Filling architraves and doors
- ✓ Filling furniture and timber
- ✓ Filling window frames and sashes

Specifications
Finish Fine
Maximum crack/hole size Build up holes greater than 40mm in stages
Skin time 5 minutes
Cure time 5 minutes
Sandable Yes (after 30 minutes)
Area Interior / Exterior
Product Chemistry Polyester
Refer to TDS for additional technical information.

Available Products		colour	carton qty
	Building Filler 500g tin Resource code: 6025254084		pink when mixed 8
	Building Filler 1kg tin Resource code: 6025254106		pink when mixed 8
	Building Filler 2kg tin Resource code: 6025254013		pink when mixed 4

Compatible Substrates
✓ Fibreglass
✓ Steel
✓ Cement sheet
✓ Concrete
✓ MDF
✓ Timber
✓ Plasterboard
✓ Masonry & brickwork
✓ Cement render
✓ Ceramic
✓ Particleboard



Max Fill™ Gap Filler

Max Fill™ Gap Filler is a premium quality, acrylic gap filler designed for general purpose gap filling around the home.



Key Benefits

- ✓ Remains flexible - years after use
- ✓ Tools and finishes perfectly
- ✓ Paintable
- ✓ Interior / Exterior
- ✓ Water clean up
- ✓ Does not slump or sag

Uses

- ✓ Patching gaps around skirting boards and architraves
- ✓ Patching gaps around window frames
- ✓ Patching gaps around cornices

Specifications
Finish Fine
Maximum crack/hole size 25mm
Skin time 10 - 20 minutes
Cure time 10mm beads full cure after 7 days (25°C, 50% RH)
Sandable Yes
Area Interior / Exterior
Product Chemistry Acrylic
Refer to TDS for additional technical information.

Available Products		colour	carton qty
	Max Fill™ Gap Filler 450g cartridge Resource code: 6003954042		white 20

Compatible Substrates
✓ Plasterboard
✓ Brick
✓ Cement sheet
✓ Aluminium
✓ Cement render
✓ Timber
✓ Concrete
✓ Ceramics

Foam Filler

350

Max Fill™

Expanding Foam

Max Fill™ Expanding foam is a triple expanding, general purpose, polyurethane foam that will fill cavities ranging in size from small gaps to larger spaces. Max Fill™ Expanding foam can be used inside or outside, will adhere to a wide range of substances and will provide an airtight, moisture resistant seal when cured.



Key Benefits	Uses
<div><div>✔</div> Triple expanding</div> <div><div>✔</div> Fills cavities without shrinking</div> <div><div>✔</div> Can be cut and sanded to produce a neat and tidy finish</div> <div><div>✔</div> When cut can be filled to produce a smooth finish</div> <div><div>✔</div> Paintable</div> <div><div>✔</div> Ozone friendly</div>	<div><div>✔</div> Sealing around penetrations through walls and floors</div> <div><div>✔</div> Filling holes in walls</div> <div><div>✔</div> Filling wide gaps and cracks around window frames</div> <div><div>✔</div> Sealing against draughts, moisture and noise</div> <div><div>✔</div> Insulating</div> <div><div>✔</div> Filling cavities in trees to prevent rot</div>

Specifications	Compatible Substrates
<div><div>Finish</div> Smooth uncut, aerated cut</div> <div><div>Maximum crack/hole size</div> Fill big cavities in stages</div> <div><div>Skin time</div> 10 - 15 minutes</div> <div><div>Cure time</div> 30mm bead 80% in 2 hrs, full cure in 24 hrs</div> <div><div>Sandable</div> No</div> <div><div>Area</div> Interior / Exterior (if painted)</div> <div><div>Product Chemistry</div> Polyurethane</div> <div>Refer to TDS for additional technical information.</div>	<div><div>✔</div> Concrete</div> <div><div>✔</div> Wood & plywood</div> <div><div>✔</div> Brick</div> <div><div>✔</div> Plasterboard</div> <div><div>✔</div> Fibreglass</div> <div><div>✔</div> Cement sheet</div> <div><div>✔</div> Galvanized iron</div> <div><div>✔</div> Particleboard</div> <div><div>✔</div> Steel</div> <div><div>✔</div> Aluminium</div>

Available Products			colour	carton qty
	Max Fill™ Foam 300mL can Resource code: 7031334161		yellow	12
	Max Fill™ Foam 500mL can Resource code: 7031334084		yellow	12
	Max Fill™ Foam 750mL can Resource code: 7031334007		yellow	12

Foam Filler

351

Fula Foam™



Pro Gun Applied Foam

Fula Foam™ Pro gun applied foam is a triple expanding, general purpose, polyurethane foam that will seal against noise and moisture, as well as fill holes and penetrations. Suitable for use with many commonly used building materials, including polystyrene.



Key Benefits	Uses
<div><div>✔</div> Triple expanding</div> <div><div>✔</div> Fills cavities without shrinking</div> <div><div>✔</div> Polystyrene safe</div> <div><div>✔</div> When cut can be filled to produce a smooth finish</div> <div><div>✔</div> Paintable</div> <div><div>✔</div> Ozone friendly</div>	<div><div>✔</div> Sealing around penetrations through walls and floors</div> <div><div>✔</div> Filling holes in walls</div> <div><div>✔</div> Filling wide gaps and cracks around window frames</div> <div><div>✔</div> Sealing against draughts, moisture and noise</div> <div><div>✔</div> Noise and thermal insulator</div> <div><div>✔</div> Concrete form sealant</div>

Specifications	Compatible Substrates
<div><div>Finish</div> Smooth uncut, aerated cut</div> <div><div>Maximum crack/hole size</div> Fill big cavities in stages</div> <div><div>Skin time</div> 10 - 15 minutes</div> <div><div>Cure time</div> 30mm bead 80% in 2 hrs, full cure in 24 hrs</div> <div><div>Sandable</div> No</div> <div><div>Area</div> Interior / Exterior (if painted)</div> <div><div>Product Chemistry</div> Polyurethane</div> <div>Refer to TDS for additional technical information.</div>	<div><div>✔</div> Concrete</div> <div><div>✔</div> Wood & plywood</div> <div><div>✔</div> Brick</div> <div><div>✔</div> Plasterboard</div> <div><div>✔</div> Fibreglass</div> <div><div>✔</div> Cement sheet</div> <div><div>✔</div> Galvanized iron</div> <div><div>✔</div> Particleboard</div> <div><div>✔</div> Steel</div> <div><div>✔</div> Aluminium</div>

Available Products			colour	carton qty
	Fula Foam™ Pro 750mL can Resource code: 7068444161		yellow	12

Powder Filler

390

Trademate™









Interior Powder Filler

Trademate™ Interior Powder Filler is a plaster based, cellulose reinforced filler formulated for filling cracks, holes and gaps.



Key Benefits	Uses
<div><div>✔</div> Plaster based powder filler</div> <div><div>✔</div> Will not shrink when cured</div> <div><div>✔</div> Excellent adhesion</div> <div><div>✔</div> Easy to sand</div> <div><div>✔</div> When dry, can be nailed or screwed without splitting or cracking</div>	<div><div>✔</div> Filling cracks, holes and gaps in substrates such as plasterboard and fibre cement sheet</div>

Specifications	Compatible Substrates
<div><div>Finish</div> Fine</div> <div><div>Maximum crack/hole size</div> None specified</div> <div><div>Cure time</div> 6 hours</div> <div><div>Sandable</div> Yes</div> <div><div>Area</div> Interior</div> <div><div>Product Chemistry</div> Plaster</div> <div>Refer to TDS for additional technical information.</div>	<div><div>✔</div> Plaster</div> <div><div>✔</div> Masonry</div> <div><div>✔</div> Plasterboard</div> <div><div>✔</div> Metal</div> <div><div>✔</div> Brick</div> <div><div>✔</div> Wood</div> <div><div>✔</div> Concrete</div> <div><div>✔</div> Fibre cement sheet</div> <div><div>✔</div> MDF</div>

Available Products			colour	carton qty
	Interior Powder Filler 500g bag Resource code: 6034744192		white	12
	Interior Powder Filler 1kg bag Resource code: 6034744146		white	6
	Interior Powder Filler 2kg bag Resource code: 6034744193		white	4
	Interior Powder Filler 6kg bucket Resource code: 6034744240		white	1

Powder Filler

391

Trademate™





Exterior Powder Filler

Trademate™ Exterior Powder Filler is a cement based, vinyl reinforced filler that won't shrink, exhibits excellent adhesion and dries grey in colour.



Key Benefits	Uses
<div><div>✔</div> Cement based powder filler</div> <div><div>✔</div> Excellent adhesion</div> <div><div>✔</div> Won't shrink when cured</div> <div><div>✔</div> Weather and water resistant</div>	<div><div>✔</div> Formulated for sealing, bonding and filling cracks, holes and gaps in stone and stucco, etc.</div>

Specifications	Compatible Substrates
<div><div>Finish</div> Coarse</div> <div><div>Maximum crack/hole size</div> None specified</div> <div><div>Cure time</div> 6 hours</div> <div><div>Sandable</div> Yes</div> <div><div>Area</div> Exterior</div> <div><div>Product Chemistry</div> Cement</div> <div>Refer to TDS for additional technical information.</div>	<div><div>✔</div> Concrete</div> <div><div>✔</div> Stone</div> <div><div>✔</div> Masonry</div> <div><div>✔</div> Stucco</div>

Available Products			colour	carton qty
	Exterior Powder Filler 500g bag Resource code: 6034754192		grey	12
	Exterior Powder Filler 1kg bag Resource code: 6034754146		grey	6

Sealants

High quality, multi-functional sealants that stay where they are applied.

400s Sealants

400
Max Seal™
Clear Sealant
Page 26



410
Ultra Clear™
Page 27



420
Fulaseal™
Page 28



500s Sealants

560
Super Seal
HPR25™
Page 30



561
Max Fix™ MS
Adhesive Sealant
Page 31



562
Super Seal
HPR50FC™
Page 32



570
Liquid Glass
Page 33





Max Seal™ Clear Sealant

Max Seal™ Clear Sealant is a premium solvent based sealant that combines flexibility with strong adhesion. Max Seal™ Clear Sealant solvent based is clear, so when applied, it becomes almost invisible and can be used on most building materials, inside and outside the home.



Key Benefits

- ✓ Touch dry in 5 minutes
- ✓ Flexible
- ✓ Interior / Exterior
- ✓ Suitable for wet areas
- ✓ Drip resistant
- ✓ Resists shrinking; will not split or crack
- ✓ Weather resistant
- ✓ Paintable

Uses

- ✓ Sealing roofing and guttering
- ✓ Sealing around shower screens, sinks and basins
- ✓ Sealing window frames & skylights

Specifications
Joint Widths Covered N/A
Movement Capability (+/-) 25%
Skin time 5 minutes
Cure time full cure after 7 days (25°C, 50% RH) with 10mm bead
Mould and Mildew Resistance Yes
Paintable Yes
Area Interior / Exterior
Product Chemistry Solvent based rubber
Refer to TDS for additional technical information.

Available products			colour	carton qty
	Max Seal™ Clear Sealant Resource code: 6034554048		clear	6

Compatible Substrates
✓ Cement
✓ Glass
✓ Stone
✓ Masonry
✓ Brick
✓ Timber
✓ Concrete
✓ Metal (pre-test before use)
✓ Ceramic
✓ Many plastics and rubbers



Ultra Clear™

Ultra Clear™ is a highly flexible sealant which guns out white, then dries clear for easy application/visibility. Ideal for sealing around windows and doors, and sealing roofing, especially polycarbonate. Ultra Clear™ is a paintable alternative to silicone or solvent borne sealants.



Key Benefits

- ✓ Isocyanate & solvent free
- ✓ Excellent resistance to weathering and UV, resists yellowing
- ✓ Guns white & dries clear for easy application
- ✓ Highly flexible
- ✓ Water based
- ✓ Easy wash up
- ✓ Paintable
- ✓ Mould resistant
- ✓ Alternative to silicone or solvent borne sealants

Uses

- ✓ Sealing polycarbonate roofing
- ✓ Sealing around windows & doors
- ✓ Sealing gaps & cracks in the bathroom & kitchen

Specifications
Joint Widths Covered Up to 15mm
Movement Capability (+/-) 25%
Skin time 10 - 20 minutes
Cure time Dependant on conditions
Mould and Mildew Resistance Yes
Paintable Yes
Area Interior / Exterior (do not expose to water until sufficiently cured)
Product Chemistry Acrylic water based
Refer to TDS for additional technical information.

Available products			colour	carton qty
	Ultra Clear™ Flexible Sealant 300g cartridge Resource code: 6012974042		white (dries clear)	20

Compatible Substrates
✓ Polycarbonate
✓ Metal
✓ Fibreglass
✓ Brick
✓ Glass
✓ Concrete
✓ Cement sheet
✓ Ceramic tiles
✓ Wood
✓ Gypsum board
✓ Many plastics (pre test)

Fulaseal™ Construction Joint Sealant

Fulaseal™ Construction Joint Sealant is a single component, water based, construction grade sealant for interior and exterior construction sealing applications. Fulaseal™ can be used in vertical and horizontal sealing applications where a flexible joint is required.



Key Benefits

- ✓ Paintable
- ✓ Highly flexible: +/- 25% joint movement capability
- ✓ Water clean up
- ✓ Non toxic
- ✓ Excellent acoustic properties
- ✓ Non flammable
- ✓ Excellent stability to UV, ozone and airborne contaminants
- ✓ Acoustic rated to AS 1276.1
- ✓ Interior/exterior application

Uses

- ✓ Joints in tilt-up and pre-cast concrete panels
- ✓ Sealant for joints in aluminium and steel frames
- ✓ Sealant for general gaps and cracks around construction sites
- ✓ Caulking hollow core ceiling and non-trafficable floor planks
- ✓ Sealing window and door frames
- ✓ Sealing vinyl, aluminium, steel and plywood sidings
- ✓ Sealing baseboards, bathroom and kitchen fixtures
- ✓ Repair mortar joints
- ✓ Refer to page 98 for Recommended Joint Configurations

Specifications

Joint Widths Covered
30mm x 15mm MAX

Movement Capability (+/-)
25%

Skin time 10 minutes

Cure time Variable dependant on conditions, 7 - 10 days for thick skin formation

Mould and Mildew Resistance No

Paintable Yes

Area Interior / Exterior
(do not expose to water until sufficiently cured)

Product Chemistry
Acrylic water based

Refer to TDS for additional technical information.

Available products



Fulaseal™ 10L pail
Resource code: 7013781513



grey

1

colour

carton qty

Compatible Substrates

- ✓ Concrete
- ✓ Cable coverings (PVC)
- ✓ Cement sheeting
- ✓ Aluminium
- ✓ Masonry
- ✓ Plasterboard
- ✓ Mortar
- ✓ Timber
- ✓ Glass
- ✓ Fibreglass
- ✓ Cork
- ✓ ABS
- ✓ Expanded polystyrene





Super Seal HPR25™ Flexible Sealant

Super Seal HPR25™ is a high performance, MS polymer, moisture curing sealant. Super Seal HPR25™ is a low modulus product which makes it ideal for use in situations that may experience significant expansion and contraction.







Key Benefits

- ✓ Fast skinning
- ✓ Highly flexible: +/- 25% joint movement capability
- ✓ Low modulus
- ✓ Isocyanate free
- ✓ Solvent free
- ✓ Excellent weather and UV resistance; resists yellowing
- ✓ Non gassing
- ✓ Does not sag or slump in joints up to 30mm

Uses

- ✓ Sealing expansion and control joints in tiling, walls, roofs, door and window frames, perimeters, cladding and brickwork
- ✓ In applications where a level of chemical resistance is required
- ✓ In seals where acoustic properties are required
- ✓ Refer to Recommended Joint Configurations on page 98

Specifications
Joint Widths Covered 30mm x 15mm MAX
Movement Capability (+/-) 25%
Skin time 100 - 200 minutes
Cure time 3mm/day (23°C, 50% RH)
Mould and Mildew Resistance No
Paintable Yes
Trafficable No
Area Interior / Exterior
Product Chemistry MS polymer
Refer to TDS for additional technical information.

Available products	colour	carton qty
 Super Seal HPR25™ Flexible Sealant 400g cartridge Resource code: 7330554250	 black	12
 Super Seal HPR25™ Flexible Sealant 400g cartridge Resource code: 7329604250	 grey	12
 Super Seal HPR25™ Flexible Sealant 400g cartridge Resource code: 7330544250	 white	12

Compatible Substrates
✓ Concrete
✓ Ceramic
✓ ABS
✓ Cement sheeting
✓ Masonry
✓ Aluminium
✓ Plasterboard
✓ Glass
✓ Steel
✓ Timber
✓ Plastics (pre-test)



Max Fix™ MS Adhesive Sealant

Max Fix™ MS Adhesive Sealant is a high performance, one component hybrid moisture curing adhesive and sealant based on MS Polymer technology, which cures to form a seal that is tough, elastic and weatherproof. Max Fix™ MS Adhesive Sealant is an excellent multipurpose high strength adhesive sealant which bonds to a wide range of surfaces providing a highly flexible bond line.






Key Benefits

- ✓ One component – easy to use
- ✓ Paintable
- ✓ Excellent weathering resistance
- ✓ Very low shrinkage on curing
- ✓ Low VOC – Greenstar project compliant
- ✓ Non-hazardous - Isocyanate free
- ✓ Medium modulus, flexible and durable +/- 25% joint movement
- ✓ Does not sag or slump in joints up to 30mm
- ✓ Excellent primer-free adhesive properties

Uses

- ✓ Sealing expansion and control joints in construction
- ✓ Applications including tiling, roof, wall, door and window-frame perimeters, cladding and brickwork
- ✓ Bonding of architectural mouldings and profiles
- ✓ Perimeter sealant/filler in high performance membrane systems
- ✓ Refer to Recommended Joint Configurations on page 98

Specifications
Joint Widths Covered 30mm x 15mm MAX
Movement Capability (+/-) 25%
Skin time 20 minutes
Cure time 2mm/day (25°C, 50% RH)
Mould and Mildew Resistance No
Paintable Yes
Trafficable No
Area Interior / Exterior
Product Chemistry MS polymer
Refer to TDS for additional technical information.

Available products	colour	carton qty
 Max Fix™ MS Adhesive Sealant 600mL Sausage Resource code: 7154444237	 black	20
 Max Fix™ MS Adhesive Sealant 600mL Sausage Resource code: 7154454237	 grey	20
 Max Fix™ MS Adhesive Sealant 600mL Sausage Resource code: 7088794237	 white	20

Compatible Substrates
✓ Steel
✓ Aluminium
✓ Cement Sheeting
✓ Masonry
✓ Ceramic
✓ ABS
✓ Plasterboard
✓ Concrete
✓ Timber
✓ Glass
✓ Many plastics (pre-test)



Super Seal HPR50FC™

Super Seal HPR50FC™ is a high performance, MS polymer, fast curing construction sealant & adhesive. Super Seal HPR50FC™ is a high modulus product, which can be used in areas of flooring where traffic may occur.





Key Benefits

- ✓ Fast curing
- ✓ Flexible: +/- 15% joint movement capability
- ✓ High modulus
- ✓ Isocyanate free
- ✓ Solvent free
- ✓ Excellent weather & UV resistance; resists yellowing
- ✓ Superior bonding
- ✓ Non gassing

Uses

- ✓ Sealing expansion and control joints in floors, pavement, roadways, walls, roofs, wall and floor penetrations, cladding and brickwork
- ✓ Elastic bonding of metals, engineered plastics, wood and ceramic surfaces
- ✓ In applications where a level of chemical resistance is required
- ✓ In seals where acoustic properties are required
- ✓ Refer to Recommended Joint Configurations on page 98

Specifications
Joint Widths Covered 30mm MAX
Movement Capability (+/-) 15%
Skin time 30 - 60 minutes dependant on conditions
Cure time 2 - 3mm/day (25°C, 50% RH)
Mould and Mildew Resistance No
Paintable Yes
Trafficable Yes
Area Interior / Exterior
Product Chemistry MS polymer
Refer to TDS for additional technical information.

Available products		colour	carton qty
	Super Seal HPR50FC™ 420g cartridge Resource code: 7329594250	 grey	12
	Super Seal HPR50FC™ 420g cartridge Resource code: 7331764250	 white	12

Compatible Substrates
✓ Concrete
✓ Ceramic
✓ Cement sheeting
✓ ABS
✓ Masonry
✓ Aluminium
✓ Plasterboard
✓ Glass
✓ Steel
✓ Timber
✓ Plastics (pre-test)



Liquid Glass

Liquid Glass is a crystal clear MS polymer designed for invisible bonding. Outstanding bond strength on nearly all surfaces, easy to tool and finish, free of solvents, isocyanates and other hazardous chemicals. Permanently flexible and paintable once cured.



Key Benefits

- ✓ Crystal clear
- ✓ Will not shrink when curing (no solvent)
- ✓ Will not affect plastic surfaces
- ✓ Does not become soft and flow when warm unlike solvent based rubber products (e.g. on a roof)
- ✓ Not flammable and non hazardous
- ✓ Can be tooled – surface will not pull and smear like solvent based rubber products
- ✓ Excellent UV resistance
- ✓ Water resistant
- ✓ Interior / Exterior
- ✓ Highly flexible: +/- 20% joint movement capability

Uses

- ✓ Sealing frameless glass shower screens and bonding to polycarbonate, e.g. greenhouse construction for maximum light transmission
- ✓ Sealing where a clearer finish than silicone is required
- ✓ Bonding glass bricks
- ✓ Replacing superglue in many areas (2mm thick film required)
- ✓ Adhesive for clear substrates where silicone often will not work e.g. acrylic signs
- ✓ Refer to Recommended Joint Configurations on page 98

Specifications
Joint Widths Covered 30mm MAX
Movement Capability (+/-) 20%
Skin time 10 - 15 minutes
Cure time 2mm/day
Mould and Mildew Resistance Yes
Paintable Yes
Trafficable No
Area Interior / Exterior
Product Chemistry MS polymer
Refer to TDS for additional technical information.

Available products		colour	carton qty
	Liquid Glass MS Sealant 300g cartridge Resource code: 7060934189	 clear	6

Compatible Substrates
✓ All metals
✓ Ceramic tiles
✓ Plasterboard
✓ Cement sheet
✓ Masonry
✓ Concrete
✓ Timber
✓ Glass
✓ Polystyrene
✓ Particleboard
✓ MDF
✓ Many plastics (pre-test)

Silicones

Silicone sealants ranging from High Temperature to General Purpose let you get the job done when dealing with the harsh Australian climate.

600s Silicone Sealants – Industrial

620

High Performance Glazing Silicone

Page 36



Premium Grade Silicone

Page 37



RTV Adhesive and Sealant

Page 38



RTV Heat Resistant

Page 39



660

High Performance Silicone

Page 40



700s Silicone Sealants

700

Roof & Gutter

Page 41



710

Glass Silicone

Page 42



720

Paintable Silicone

Page 43



Brick & Concrete Silicone

Page 44



740

Bathroom & Kitchen Silicone

Page 45



750

Multi Purpose Silicone

Page 46



760

Glazing Silicone

Page 47



770

Sanitary Silicone

Page 48



780

Plumbers Silicone

Page 50



790

Mirror and Metal Silicone

Page 51







HBF 620™ High Performance Glazing Silicone

HBF 620™ is a premium grade, acetic cure glazing silicone for use in glazing, and other glass bonding and sealing applications. HBF 620™ is a high modulus product that offers increased tensile strength compared to standard silicones.

Key Benefits	Uses
<div><div>✓</div>Superior adhesion to glass</div> <div><div>✓</div>High modulus glazing silicone</div> <div><div>✓</div>Highly elastic: +/- 25% movement capability</div> <div><div>✓</div>Acetic cure</div>	<div><div>✓</div>General glazing installations</div> <div><div>✓</div>Aquariums up to 400 litres</div> <div><div>✓</div>Toughened glass assemblies</div> <div><div>✓</div>Industrial and automotive maintenance</div>

Specifications
Movement Capability (+/-) 25%
Skin time 20 minutes (25°C, 50% RH)
Cure time 3mm per day (25°C, 50% RH)
Mould and Mildew Resistance No
Paintable No
Potable Water approved No
Area Interior / Exterior
Product Chemistry Acetic cure Silicone
Refer to TDS for additional technical information.

Available products		colour	carton qty
	HBF 620™ High Performance Glazing Silicone 300g cartridge Resource code: 7056094221	 translucent	12

Compatible Substrates
<div><div>✓</div>Timber</div> <div><div>✓</div>Ceramic</div> <div><div>✓</div>Glass</div> <div><div>✓</div>Aluminium</div> <div><div>✓</div>Many plastics (pre-test)</div>











HBF 300™ Premium Grade Silicone Sealant

HBF 300™ Premium Grade Silicone Sealant is a neutral cure, premium grade, silicone sealant specially formulated for use in glazing and industrial fabrication where a premium quality, non-corrosive sealant is required, which skins quickly and is easy to use. HBF 300™ Premium Grade Silicone Sealant combines a high level of resistance to weathering with excellent adhesion, flexibility and durability. HBF 300™ Premium Grade Silicone Sealant can also be used as an adhesive where a highly flexible, high temperature resistant bond is required.

Key Benefits	Uses
<div><div>✓</div>Fast Skinning</div> <div><div>✓</div>Low Sag</div> <div><div>✓</div>Low Shrinkage</div> <div><div>✓</div>Neutral Cure</div> <div><div>✓</div>UV & Weather Resistant</div> <div><div>✓</div>Low VOC</div>	<div><div>✓</div>Sealing glass block structures, laminated glass, roof, gutters, tanks & silos</div> <div><div>✓</div>Glass partitions</div> <div><div>✓</div>Glazing & waterproofing of skylights</div> <div><div>✓</div>Non structural weather sealing of curtain wall facades</div> <div><div>✓</div>Sealing & insulating of electrical services</div> <div><div>✓</div>Filling channels & sealing lap joints in metal fabrication</div> <div><div>✓</div>Sealing sheet metal wall cladding</div> <div><div>✓</div>Bonding mirrors - including silver backed mirrors</div>

Specifications
Movement Capability (+/-) 20%
Skin time 7 minutes
Cure time 2mm per day (25°C, 50% RH))
Mould and Mildew Resistance No
Paintable No
Potable Water approved No
Area Interior / Exterior
Product Chemistry Neutral cure silicone
Refer to TDS for additional technical information.

Available products		colour	carton qty
	HBF 300™ Premium Grade Silicone Sealant 300g cartridge Resource code: 7071884042	 black	20
	HBF 300™ Premium Grade Silicone Sealant 300g cartridge Resource code: 7071864042	 grey	20
	HBF 300™ Premium Grade Silicone Sealant 300g cartridge Resource code: 7359764286	 translucent	20
	HBF 300™ Premium Grade Silicone Sealant 300g cartridge Resource code: 7071874042	 white	20

Compatible Substrates
<div><div>✓</div>Timber</div> <div><div>✓</div>Ceramic</div> <div><div>✓</div>Aluminium</div> <div><div>✓</div>Glass</div> <div><div>✓</div>Concrete</div> <div><div>✓</div>Non-oily timber</div> <div><div>✓</div>Steel</div> <div><div>✓</div>Some Plastic (pre-test)</div>







HBF 730™ RTV Adhesive & Sealant Silicone

HBF 730™ industrial grade silicone is a multi purpose, one component RTV (Room Temperature Vulcanising) silicone used for industrial sealing and bonding. HBF 730™ industrial grade silicone forms a tough rubber like film which out-performs standard grade silicones and is UV, vibration and temperature resistant.

Key Benefits	Uses
<ul style="list-style-type: none"> ✓ 100% industrial grade silicone ✓ Industrial sealing and bonding ✓ General purpose plant maintenance ✓ Acetic cure ✓ Permanently flexible: +/- 25% joint movement capabilities ✓ Strong adhesion ✓ High tensile strength ✓ Rapid cure ✓ Sag resistant ✓ Suitable for indirect food contact use 	<ul style="list-style-type: none"> ✓ General industrial bonding ✓ Thread sealing ✓ Sealing industrial machinery ✓ Sealing between aluminium and glass windows ✓ Emergency gaskets ✓ Sign fixing ✓ Bonding and sealing appliance parts ✓ Sealing flashing in vents, flues, marine cabins and windows ✓ Caulking joints in sheet metal stacks and ducting ✓ Adhering auto trim, appliance trim and name plates

Specifications
Movement Capability (+/-) 25%
Skin time 20 minutes (25°C, 50% RH)
Cure time 3mm/day (25°C, 50% RH)
Mould and Mildew Resistance No
Paintable No
Potable Water approved No
Area Interior / Exterior
Product Chemistry RTV silicone
Refer to TDS for additional technical information.

Available products	colour	carton qty
 HBF 730™ RTV Adhesive & Sealant Silicone 300g cartridge Resource code: 7056094164	 translucent	12
 HBF 730™ RTV Adhesive & Sealant Silicone 300g cartridge Resource code: 7056104164	 black	12

Compatible Substrates
<ul style="list-style-type: none"> ✓ Ceramic tile ✓ Glass ✓ Steel ✓ Tile ✓ Aluminium ✓ Fibreglass ✓ Non oily timber



HBF 260™ Heat Resistant RTV Silicone

HBF 260™ is a heat resistant RTV (Room Temperature Vulcanising) silicone specially formulated to be used in areas where heat resistant applications are required. HBF 260™ may be used for a variety of industrial bonding and sealing applications. Can withstand intermittent temperatures of up to 312°C and continuous temperatures of 260°C.

Key Benefits	Uses
<ul style="list-style-type: none"> ✓ 100% industrial grade silicone for sealing and bonding ✓ Heat resistant up to 312°C ✓ Acetic cure ✓ Permanently flexible: +/- 25% joint movement ✓ Excellent resistance to weathering and UV radiation ✓ Resistant to vibration ✓ High tensile strength ✓ Rapid cure 	<ul style="list-style-type: none"> ✓ General industrial bonding and sealing ✓ Sealing industrial ovens and oven belts ✓ Sealing gaskets in high temperature applications e.g. automotive engines ✓ Forming gaskets ✓ Repairing cracks requiring temperature resistance



Specifications
Movement Capability (+/-) 25%
Skin time 10 - 20 minutes (25°C, 50% RH)
Cure time 3mm/day
Mould and Mildew Resistance No
Paintable No
Potable Water approved No
Area Interior / Exterior
Product Chemistry RTV silicone
Refer to TDS for additional technical information.

Available products	colour	carton qty
 HBF 260™ Heat Resistant RTV Silicone 300g cartridge Resource code: 7057194189	 red	6

Compatible Substrates
<ul style="list-style-type: none"> ✓ Ceramic ✓ Glass ✓ Steel ✓ Ceramic tile ✓ Aluminium ✓ Fibreglass ✓ Non oily timber







HBF 660™ High Performance Silicone Sealant

HBF 660™ is a high modulus, premium grade, neutral cure silicone sealant for a wide range of industrial, glazing, cladding, automotive and assembly applications. HBF 660™ has extra high body reducing the risk of slumping when used on sloping surfaces, and exhibits superior adhesion on a wide range of surfaces.

Key Benefits	Uses
<div><div></div>Quick skin time</div> <div><div></div>Excellent weathering and UV resistance</div> <div><div></div>For use with potable (drinking) water (AS4020-1999)</div> <div><div></div>Neutral Cure</div>	<div><div></div>Glazing of butt joints and colonial bars, fin glazing</div> <div><div></div>Sealing laminated and reflective glass, water tank production</div> <div><div></div>Sealing of aluminium facades</div> <div><div></div>Bonding of solar pool heating collectors, fast moving industrial assembly</div> <div><div></div>Architectural facades and glazing</div>

Specifications
Movement Capability (+/-) 25%
Skin time 2 - 5 minutes (25°C, 50% RH)
Cure time 2 - 3mm per day
Mould and Mildew Resistance No
Paintable No
Potable Water approved Yes
Area Interior / Exterior
Product Chemistry Neutral cure silicone
Refer to TDS for additional technical information.

Available products		colour	carton qty
	HBF 660™ High Performance Silicone Sealant 300g cartridge Resource code: 7060914164	 translucent	12
	HBF 660™ High Performance Silicone Sealant 300g cartridge Resource code: 7060924164	 black	12

Compatible Substrates
<div><div></div>Timber</div> <div><div></div>Ceramic</div> <div><div></div>Metals</div> <div><div></div>Glass</div> <div><div></div>Concrete</div> <div><div></div>Many plastics (pre-test)</div>









Max Seal™ 700 Roof & Gutter Silicone Sealant

Max Seal™ 700 Roof & Gutter Silicone Sealant is a neutral cure sealant that does not corrode materials commonly used in roofs & gutters. Max Seal™ 700 Roof & Gutter is ideal for sealing and weatherproofing roof and rainwater systems.

Key Benefits	Uses
<div><div></div>For use in contact with potable (drinking) water (AS4020-1999)</div> <div><div></div>Permanently flexible: +/- 25% joint movement capability</div> <div><div></div>Neutral cure – will not corrode metal or concrete</div> <div><div></div>Water resistant</div> <div><div></div>UV and weather resistant</div> <div><div></div>25 year guarantee against cracking, drying out or crumbling</div>	<div><div></div>Sealing and weatherproofing roof and rainwater systems</div> <div><div></div>Sheet metal and aluminium roofing applications</div> <div><div></div>Sealing guttering, flashing and downpipes</div> <div><div></div>Sealing exterior cladding</div>

Specifications
Joint Widths Covered N/A
Movement Capability (+/-) 25%
Skin time 15 - 25 minutes (25°C, 50% RH)
Cure time 1 - 2mm per day (25°C, 50% RH)
Mould and Mildew Resistance No
Paintable No
Potable Water approved Yes
Area Interior / Exterior
Product Chemistry Neutral cure silicone
Refer to TDS for additional technical information.

Available products		colour	carton qty
	Max Seal™ 700 Roof & Gutter Silicone Sealant 300g cartridge Resource code: 6004484033	 black	20
	Max Seal™ 700 Roof & Gutter Silicone Sealant 300g cartridge Resource code: 6004524033	 translucent	20
	Max Seal™ 700 Roof & Gutter Silicone Sealant 400g cartridge Resource code: 6004504033	 grey	20

Compatible Substrates
<div><div></div>Aluminium</div> <div><div></div>Lead</div> <div><div></div>Stainless steel</div> <div><div></div>Rigid PVC</div> <div><div></div>Galvanised iron</div> <div><div></div>Ceramic tiles</div> <div><div></div>Many plastics (pre-test)</div>



Max Seal™ 710 General Glazing Silicone Sealant

Max Seal™ 710 General Glazing Silicone Sealant is an acetic cure sealant specially formulated for use in general glazing and sealing applications. Max Seal™ 710 combines resistance to weathering with excellent adhesion and flexibility.



Key Benefits

- ✓ Seals water tight
- ✓ Permanently flexible: +/- 15% joint movement capability
- ✓ UV and weather resistant
- ✓ Acetic cure
- ✓ Interior / Exterior
- ✓ 25 year guarantee against cracking, drying out or crumbling

Uses

- ✓ General glazing
- ✓ Bonding glass and plastics
- ✓ Sealing glass block structures
- ✓ Glazing and waterproofing skylights

Specifications
Joint Widths Covered Up to 25mm
Movement Capability (+/-) 15%
Skin time 25 minutes (25°C, 50% RH)
Cure time 2mm per day (25°C, 50% RH)
Mould and Mildew Resistance No
Paintable No
Potable Water approved No
Area Interior / Exterior
Product Chemistry Acetic cure silicone
Refer to TDS for additional technical information.

Available products		colour	carton qty
	Max Seal™ 710 General Glazing Silicone Sealant 300g cartridge Resource code: 6004464033	 translucent	20

Compatible Substrates
✓ Glass
✓ Fibreglass
✓ Wood
✓ Aluminium
✓ Ceramic
✓ Many plastics (pre-test)



720 Paintable MS Silicone Sealant

720 Paintable MS silicone sealant is a premium quality sealant specially designed to be permanently paintable. 720 Paintable has a +/- 25% joint movement capability, and can be used for interior/exterior.

Key Benefits

- ✓ Paintable anytime with water based paint
- ✓ Bonds to most surfaces without priming
- ✓ Low VOC content
- ✓ Isocyanate and solvent free
- ✓ Permanently flexible: +/- 25% joint movement capability
- ✓ Interior / Exterior
- ✓ Chemical and UV resistant

Uses

- ✓ Sealing inside and outside the home
- ✓ Sealing and weatherproofing buildings
- ✓ Sealing window surrounds
- ✓ Sealing timber siding
- ✓ Sealing architraves and skirting boards

Specifications
Joint Widths Covered Up to 30mm
Movement Capability (+/-) 25%
Skin time 2 - 4 Hours (25°C, 50% RH)
Cure time 3mm/day (25°C, 50% RH)
Mould and Mildew Resistance No
Paintable Yes
Potable Water approved No
Area Interior / Exterior
Product Chemistry MS polymer
Refer to TDS for additional technical information.

Available products		colour	carton qty
	720 Paintable MS Silicone Sealant 400g cartridge Resource code: 7330544245	 white	12

Compatible Substrates
✓ Cement render
✓ Aluminium
✓ Brick
✓ Masonry
✓ Ceramic tiles
✓ Timber
✓ Plasterboard
✓ Fibre cement sheet
✓ Many plastics (pre-test)





705 Brick & Concrete Silicone Sealant

705 Brick & Concrete Silicone Sealant is a neutral cure sealant specially designed for use on surfaces where a weatherproof and flexible seal is required. 705 Brick & Concrete is ideal for sealing joints in brick walls and sealing expansion joints in concrete.

Key Benefits	Uses
<div><div>✔</div>Grey colour to match concrete structures</div> <div><div>✔</div>Mineral filled to give increased film hardness</div> <div><div>✔</div>Permanently flexible: +/- 25% joint movement capability</div> <div><div>✔</div>Neutral cure – will not corrode metal or concrete</div> <div><div>✔</div>25 year guarantee against cracking, drying out or crumbling</div>	<div><div>✔</div>Sealing and weatherproofing</div> <div><div>✔</div>Sealing and filling concrete gaps and cracks</div> <div><div>✔</div>Filling expansion joints in concrete brickwork</div> <div><div>✔</div>Repair cracks in walls, driveways and patios</div>

Specifications
Joint Widths Covered Up to 25mm
Movement Capability (+/-) 25%
Skin time 15 - 25 minutes (25°C, 50% RH)
Cure time 1 - 2mm per day (25°C, 50% RH)
Mould and Mildew Resistance No
Paintable No
Potable Water approved No
Area Interior / Exterior
Product Chemistry Neutral cure silicone
Refer to TDS for additional technical information.

Available products		colour	carton qty
	705 Brick & Concrete Silicone Sealant 400g cartridge Resource code: 6033084119	 grey	20

Compatible Substrates
<div><div>✔</div>Brick</div> <div><div>✔</div>Brick and mortar</div> <div><div>✔</div>Concrete</div> <div><div>✔</div>Masonry</div> <div><div>✔</div>Ceramic</div> <div><div>✔</div>Stone</div> <div><div>✔</div>Fibre cement</div> <div><div>✔</div>Terracotta</div>





740 Bathroom & Kitchen Silicone Sealant

740 Bathroom & Kitchen Silicone Sealant is specifically designed for use in sealing applications involving non-porous surfaces commonly found in bathrooms, kitchens and laundries.

Key Benefits	Uses
<div><div>✔</div>Contains fungicide that resists mould and mildew</div> <div><div>✔</div>Permanently flexible: +/- 25% joint movement capability</div> <div><div>✔</div>Acetic cure</div> <div><div>✔</div>Seals water tight</div> <div><div>✔</div>25 year guarantee against cracking, drying out or crumbling</div>	<div><div>✔</div>Sealing and waterproofing around sinks and other plumbing fixtures</div> <div><div>✔</div>Sealing around shower screen and bases</div> <div><div>✔</div>Sealing around bath tubs and spas</div>



Specifications
Joint Widths Covered N/A
Movement Capability (+/-) 25%
Skin time <1 hour (25°C, 50% RH)
Cure time 2mm per day (25°C, 50% RH)
Mould and Mildew Resistance Yes
Paintable No
Potable Water approved No
Area Interior / Exterior
Product Chemistry Acetic cure silicone
Refer to TDS for additional technical information.

Available products		colour	carton qty
	740 Bathroom & Kitchen Silicone Sealant 300g cartridge Resource code: 6004444033	 translucent	20
	740 Bathroom & Kitchen Silicone Sealant 300g cartridge Resource code: 6004454033	 white	20

Compatible Substrates
<div><div>✔</div>Vitreous china</div> <div><div>✔</div>Glass</div> <div><div>✔</div>Non oily timber</div> <div><div>✔</div>Ceramic tiles</div> <div><div>✔</div>Fibreglass</div> <div><div>✔</div>Baked enamel surfaces</div> <div><div>✔</div>Many plastics (pre-test)</div>



750 Multi Purpose Silicone Sealant

750 Multi Purpose Silicone Sealant is suitable for a wide range of applications including those where galvanised metals and concrete are involved.



Key Benefits

- ✓ Superior clarity
- ✓ Permanently flexible: +/- 25% joint movement capability
- ✓ Neutral cure – will not corrode metal or concrete
- ✓ Water resistant
- ✓ For use in contact with potable (drinking) water (AS4020-1999)
- ✓ 25 year guarantee against cracking, drying out or crumbling

Uses

- ✓ Sealing and weatherproofing buildings
- ✓ Non structural glazing
- ✓ Sealing leaking gutters and downpipes
- ✓ Sealing external cladding

Specifications
Joint Widths Covered N/A
Movement Capability (+/-) 25%
Skin time 15 - 25 minutes (25°C, 50% RH)
Cure time 1 - 2mm per day (25°C, 50% RH)
Mould and Mildew Resistance No
Paintable No
Potable Water approved Yes
Area Interior / Exterior
Product Chemistry Neutral cure silicone
Refer to TDS for additional technical information.

Available products	colour	carton qty
 750 Multi Purpose Silicone Sealant 300g cartridge Resource code: 6004534033	 translucent	20

Compatible Substrates
✓ Timber
✓ Glass
✓ Fibreglass
✓ Pre-cast panels
✓ Ceramic tiles
✓ Stainless steel
✓ Concrete
✓ Laminated board
✓ Many plastics (pre-test)



Max Seal™ 760 General Glazing Silicone Sealant

Max Seal™ 760 General Glazing Silicone Sealant is a matt black, neutral cure sealant designed to complement commonly used window surrounds.



Key Benefits

- ✓ Ideal for general glazing
- ✓ Permanently flexible: +/- 20% joint movement capability
- ✓ UV, weather and water resistant
- ✓ Neutral cure – will not corrode metal or concrete
- ✓ 25 year guarantee against cracking, drying out or crumbling

Uses

- ✓ Weather sealing and glazing
- ✓ Metal assembly
- ✓ Heating, air conditioning and ventilation

Specifications
Joint Widths Covered Up to 20mm
Movement Capability (+/-) 20%
Skin time 30 minutes (25°C, 50% RH)
Cure time 2mm per day (25°C, 50% RH)
Mould and Mildew Resistance Yes
Paintable No
Potable Water approved No
Area Interior / Exterior
Product Chemistry Neutral cure silicone
Refer to TDS for additional technical information.

Available products	colour	carton qty
 Max Seal™ 760 General Glazing Silicone Sealant 400g cartridge Resource code: 7318694220	 coal black	20

Compatible Substrates
✓ Stainless steel
✓ Aluminium
✓ Glass
✓ Rigid PVC
✓ Ceramic tiles
✓ Lead
✓ Terracotta
✓ Fibreglass

Silicone Sealant



770







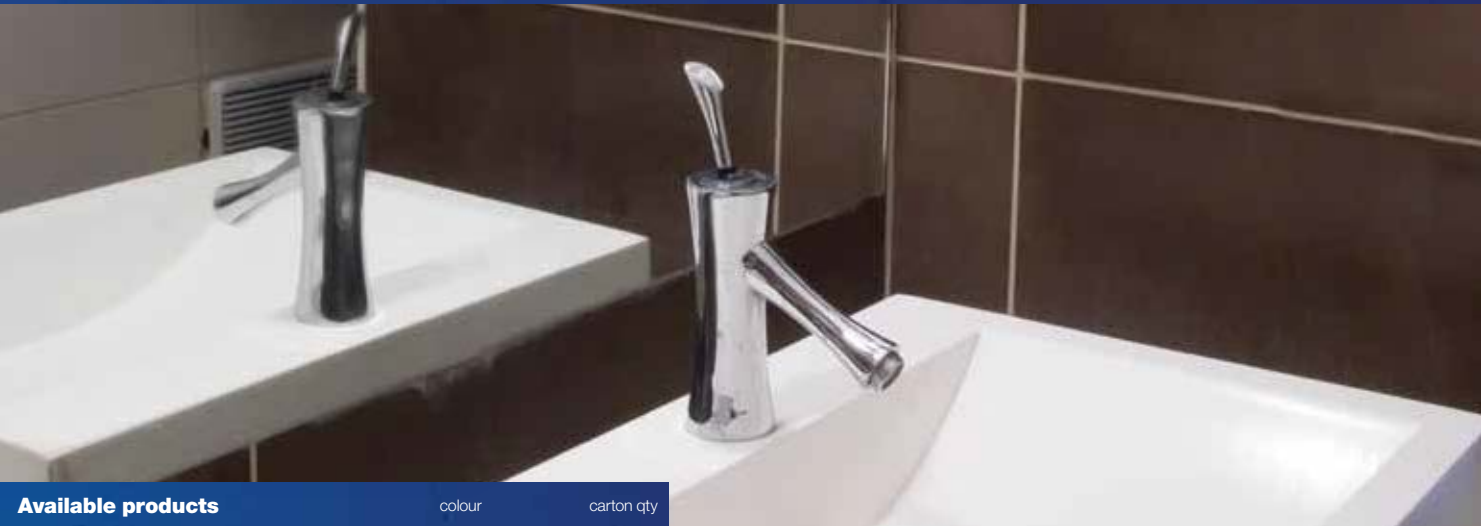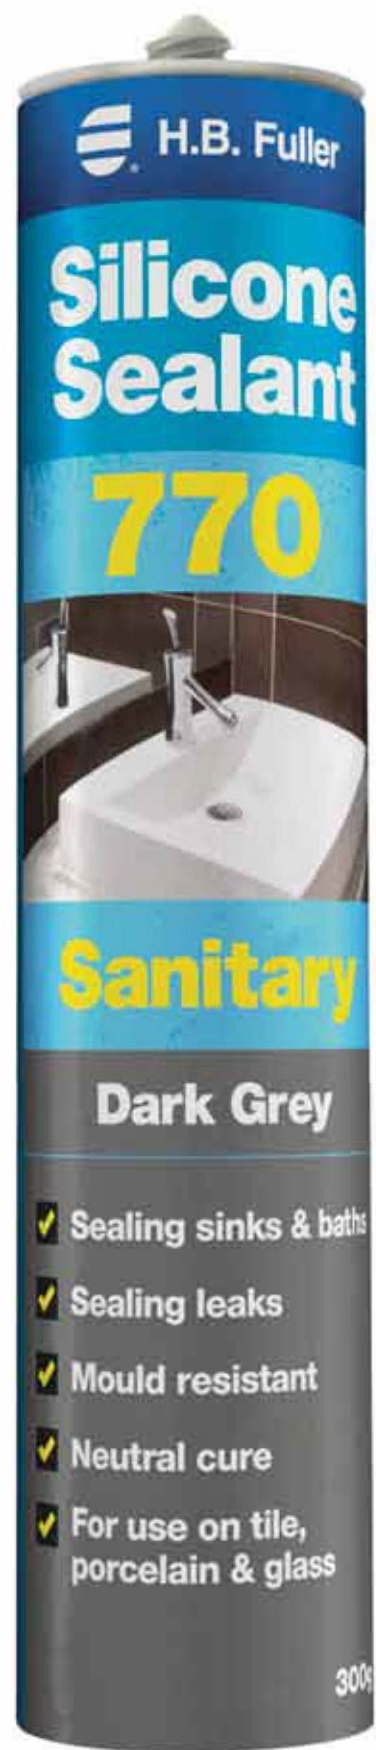













770 Sanitary Silicone Sealant

770 Sanitary Silicone Sealant is specifically designed for use in wet areas and contains a mould and mildew inhibitor. 770 Sanitary Silicone is suitable for contact with aluminium shower screens.

Key Benefits	Uses
<div><div>✓</div>Primerless adhesion to the widest range of surfaces</div> <div><div>✓</div>Contains fungicide that resists mould and mildew</div> <div><div>✓</div>Permanently flexible: +/- 20% joint movement capability</div> <div><div>✓</div>Neutral cure – will not corrode metal or concrete</div> <div><div>✓</div>Strong adhesion</div> <div><div>✓</div>25 year guarantee against cracking, drying out or crumbling</div>	<div><div>✓</div>Sealing around showers</div> <div><div>✓</div>Sealing inside bath tubs</div> <div><div>✓</div>Sealing around sinks</div> <div><div>✓</div>Sealing in laundries</div> <div><div>✓</div>Sealing and weather proofing sanitary ware and spas</div> <div><div>✓</div>Suitable for wet areas</div>

Specifications	Compatible Substrates
Joint Widths Covered N/A	<div><div>✓</div>Steel</div>
Movement Capability (+/-) 20%	<div><div>✓</div>Aluminium</div>
Skin time 5 - 10 minutes (25°C, 50% RH)	<div><div>✓</div>Galvanized iron</div>
Cure time 1 - 2mm/day (25°C, 50% RH)	<div><div>✓</div>Masonry</div>
Mould and Mildew Resistance Yes	<div><div>✓</div>Ceramic tiles</div>
Paintable No	<div><div>✓</div>Zincalume</div>
Potable Water approved No	<div><div>✓</div>Lead</div>
Area Interior / Exterior	<div><div>✓</div>Fibreglass</div>
Product Chemistry Neutral cure silicone	<div><div>✓</div>Terracotta</div>
	<div><div>✓</div>Glass</div>
	<div><div>✓</div>Many plastics (pre-test)</div>
Refer to TDS for additional technical information.	



Available products				
		colour	carton qty	
 770 Sanitary Silicone Sealant 300g cartridge Resource code: 6009104033		white	20	White
 770 Sanitary Silicone Sealant 300g cartridge Resource code: 6009094033		translucent	20	Translucent
 770 Sanitary Silicone Sealant 300g cartridge Resource code: 7056084164		almond ivory	12	Almond Ivory
 770 Sanitary Silicone Sealant 300g cartridge Resource code: 7056074164		tile grey	12	Tile Grey
 770 Sanitary Silicone Sealant 300g cartridge Resource code: 7363134164		mid grey	12	Mid Grey
 770 Sanitary Silicone Sealant 300g cartridge Resource code: 7433654164		alabaster	12	Alabaster
 770 Sanitary Silicone Sealant 300g cartridge Resource code: 7433644164		coffee	12	Coffee
 770 Sanitary Silicone Sealant 300g cartridge Resource code: 7433624164		platinum grey	12	Platinum Grey
 770 Sanitary Silicone Sealant 300g cartridge Resource code: 7433634164		dark grey	12	Dark Grey
 770 Sanitary Silicone Sealant 300g cartridge Resource code: 7433664164		charcoal	12	Charcoal









Max Seal™ 780 Plumbers Silicone Sealant

Max Seal™ 780 Plumbers Silicone Sealant is a neutral cure sealant which does not corrode materials commonly used in roofs and gutters.

Key Benefits	Uses
<div><div>✔</div>For use with potable (drinking) water (AS4020-1999)</div> <div><div>✔</div>Permanently flexible: +/- 25% joint movement capability</div> <div><div>✔</div>Interior / Exterior</div> <div><div>✔</div>Neutral cure – will not corrode metal or concrete</div> <div><div>✔</div>25 year guarantee against cracking, drying out or crumbling</div> <div><div>✔</div>Water resistant</div>	<div><div>✔</div>Used in sheet metal and aluminium roofing applications</div> <div><div>✔</div>Exterior cladding</div> <div><div>✔</div>Guttering</div> <div><div>✔</div>Flashing</div> <div><div>✔</div>Downpipes</div>

Specifications
Joint Widths Covered Up to 25mm
Movement Capability (+/-) 25%
Skin time 15 - 25 minutes (25°C, 50% RH)
Cure time 1 - 2mm/day (25°C, 50% RH)
Mould and Mildew Resistance No
Paintable No
Potable Water approved Yes
Area Interior / Exterior
Product Chemistry Neutral cure silicone
Refer to TDS for additional technical information.

Available products		colour	carton qty
	Max Seal™ 780 Plumbers Silicone Sealant 300g cartridge Resource code: 6009014033	 translucent	20
	Max Seal™ 780 Plumbers Silicone Sealant 300g cartridge Resource code: 7024544033	 aluminium	20
	Max Seal™ 780 Plumbers Silicone Sealant 400g cartridge Resource code: 6009024119	 grey	20



Compatible Substrates
<div><div>✔</div>Steel</div> <div><div>✔</div>Aluminium</div> <div><div>✔</div>Galvanized iron</div> <div><div>✔</div>Masonry</div> <div><div>✔</div>Ceramic tiles</div> <div><div>✔</div>Zincalume</div> <div><div>✔</div>Lead</div> <div><div>✔</div>Fibreglass</div> <div><div>✔</div>Terracotta</div> <div><div>✔</div>Many plastics (pre-test)</div> <div><div>✔</div>Glass</div>

790 Mirror & Metal Silicone Sealant

790 Mirror & Metal Silicone Sealant is specially formulated for a wide range of sealing uses. 790 Mirror & Metal is ideal for bonding standard silvered mirrors to walls and other general purpose metal bonding and sealing.

Key Benefits	Uses
<div><div>✔</div>Permanently flexible: +/- 25% joint movement capability</div> <div><div>✔</div>Interior / Exterior</div> <div><div>✔</div>UV and weather resistant</div> <div><div>✔</div>Neutral cure – will not corrode metal or concrete</div> <div><div>✔</div>25 year guarantee against cracking, drying out or crumbling</div>	<div><div>✔</div>Sealing heating, ventilation and air-conditioning units</div> <div><div>✔</div>Non structural glazing</div> <div><div>✔</div>Metal assembly</div> <div><div>✔</div>Bonding mirrors and metals</div>

Specifications
Joint Widths Covered N/A
Movement Capability (+/-) 25%
Skin time 15 - 25 minutes (25°C, 50% RH)
Cure time 1 - 2mm/day (25°C, 50% RH)
Mould and Mildew Resistance No
Paintable No
Potable Water approved Yes
Area Interior / Exterior
Product Chemistry Neutral cure silicone
Refer to TDS for additional technical information.


Available products		colour	carton qty
	790 Mirror & Metal Silicone Sealant 300g cartridge Resource code: 6009264033	 translucent	20

Compatible Substrates
<div><div>✔</div>Glass</div> <div><div>✔</div>Aluminium</div> <div><div>✔</div>Stainless steel</div> <div><div>✔</div>Brick</div> <div><div>✔</div>Ceramic tiles</div> <div><div>✔</div>Concrete</div> <div><div>✔</div>Masonry</div> <div><div>✔</div>Many plastics (pre-test)</div>



Flooring

Flooring products formulated for Australia which applies smoothly and gives you a permanent covering and the structural strength all year round.

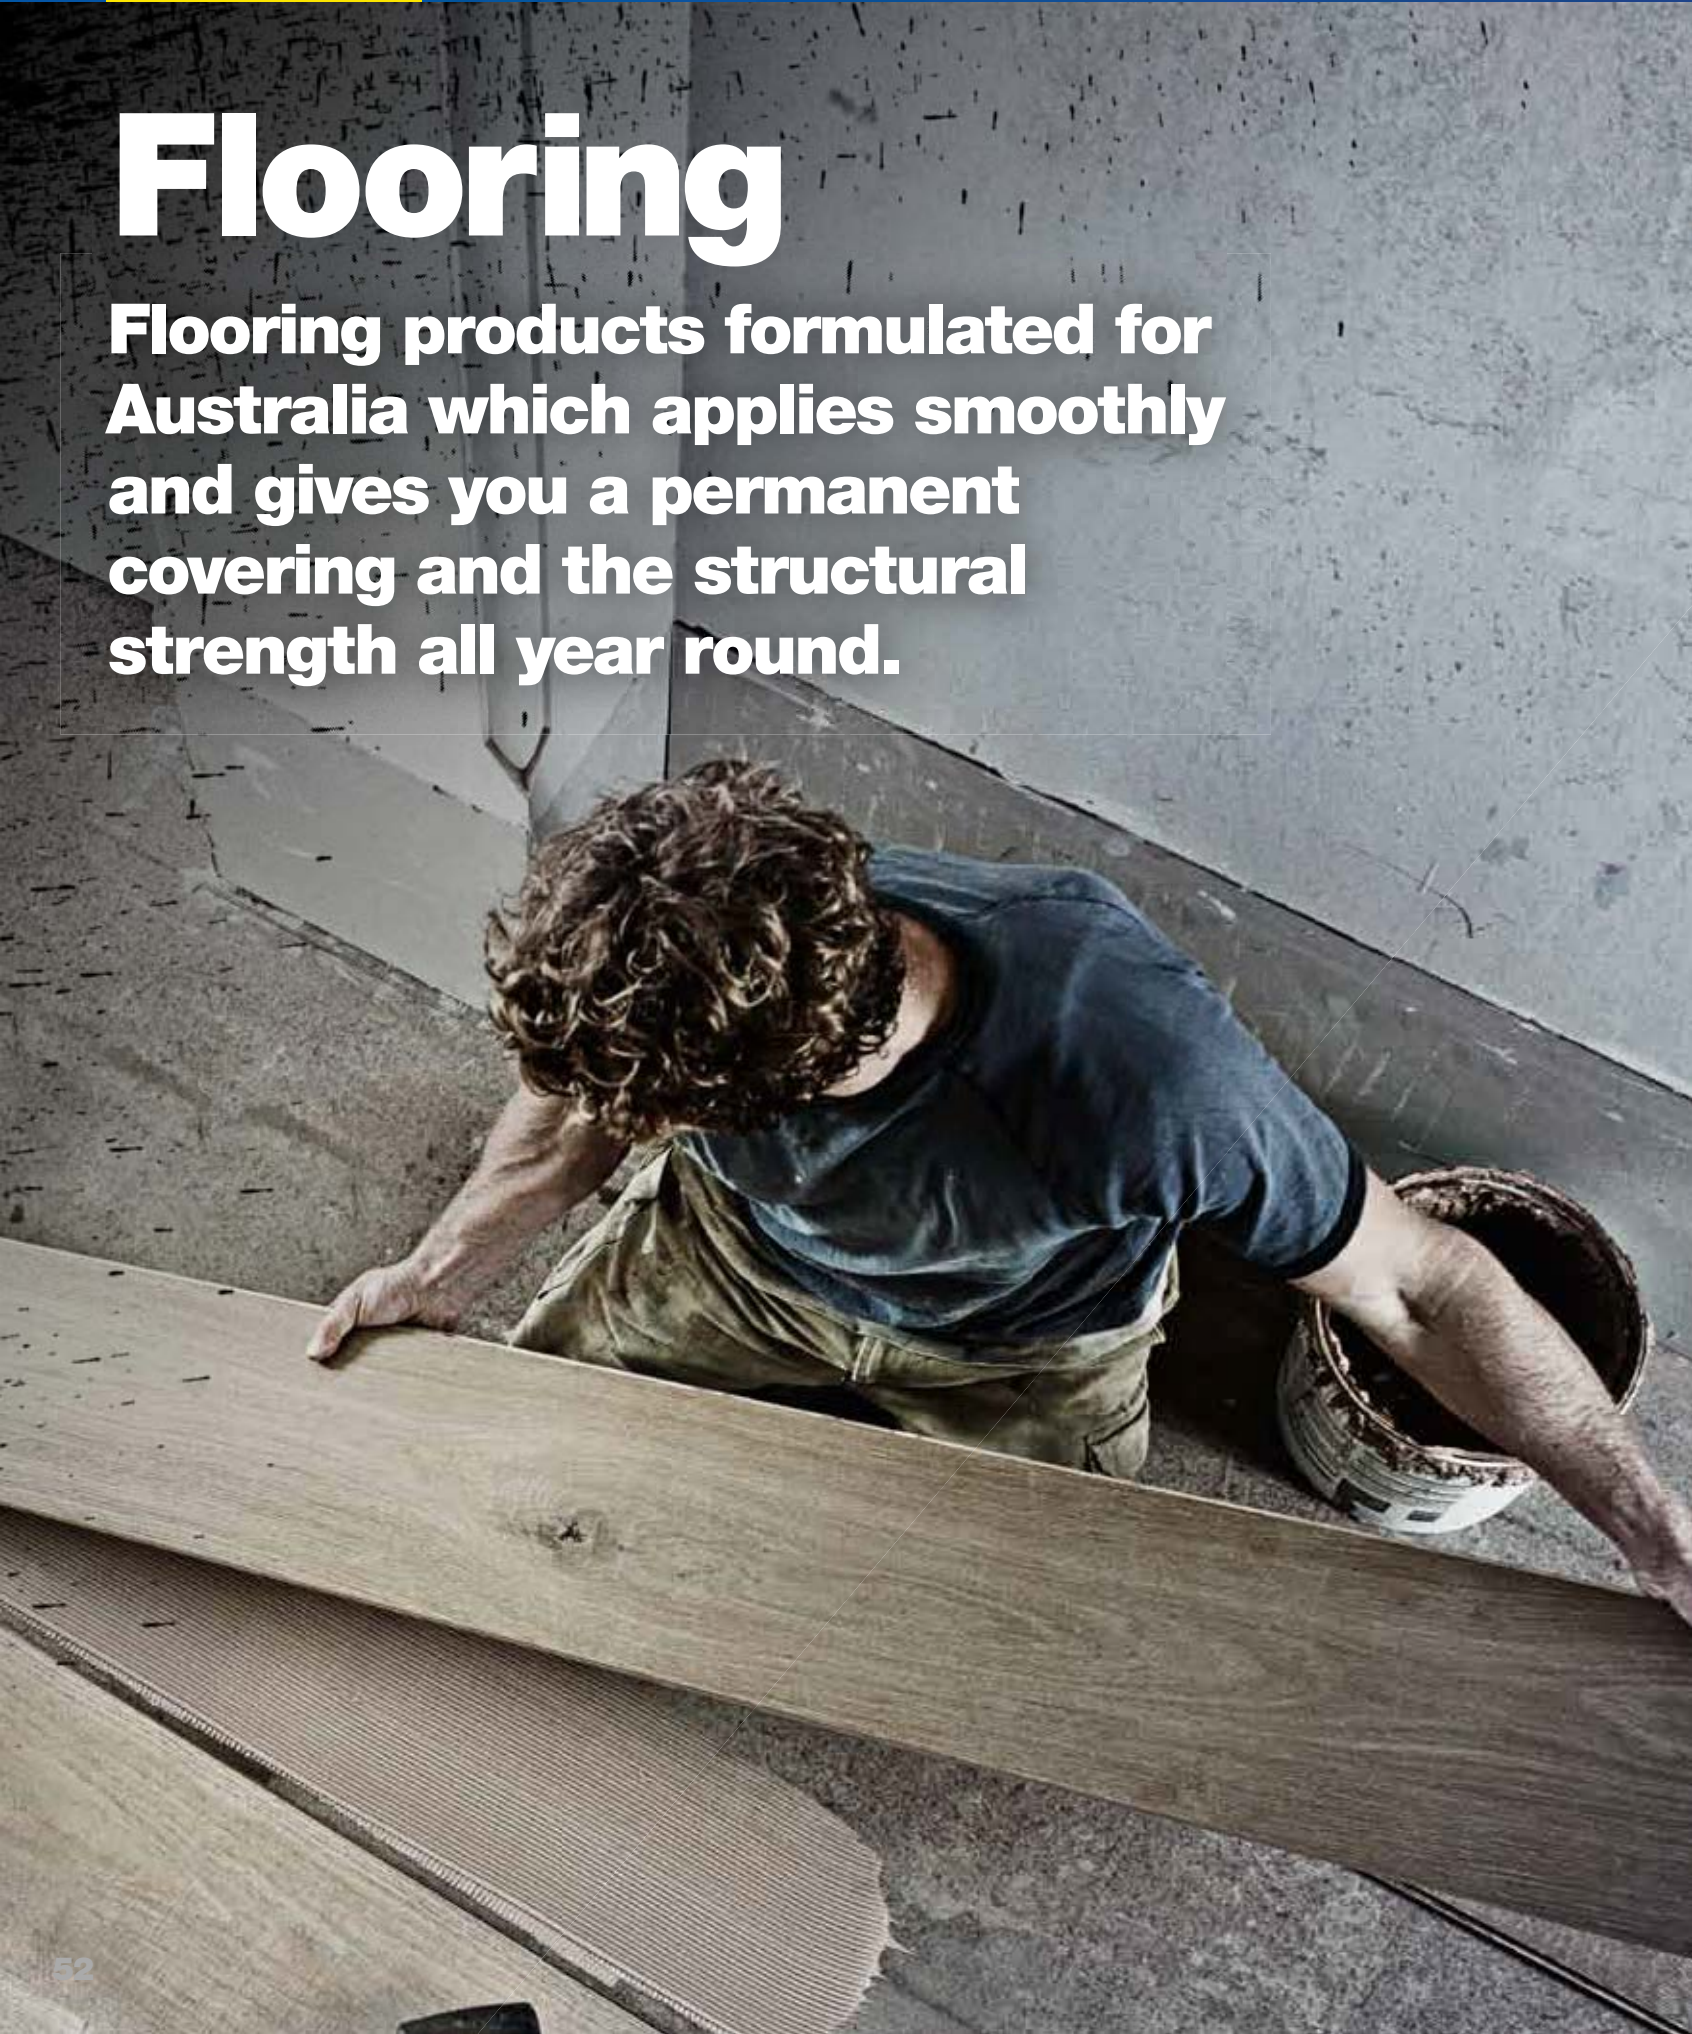

800s Timber Flooring

850
**Floor Bond
XMS™**
Page 54



860
**Floor Seal
Epoxy™
Sealant
Part A**
Page 55



860
**Floor Seal
Epoxy™
Sealant
Part B**
Page 55



900s Miscellaneous Flooring

920
Easy Tile™
Page 56



980
**WPM 300™
Water Proofing
Membrane**
Page 57







Floor Bond XMS™ Timber Flooring Adhesive

Floor Bond XMS™ is a high strength, high performance, MS polymer flooring adhesive. Ready to use with no mixing required, extremely smooth and easy to trowel. As Floor Bond XMS™ contains no water or solvents, the risk of deforming timber flooring is eliminated.

Key Benefits	Uses
<div><div>✓</div>Non toxic/isocyanate free</div> <div><div>✓</div>No black hands after use</div> <div><div>✓</div>Forms stable peaks once applied with a notched trowel</div> <div><div>✓</div>Contains no water, solvents or isocyanates</div> <div><div>✓</div>Acoustic rated, CSIRO - Report No. INR 157</div> <div><div>✓</div>Floor Bond XMS™ 16kg is reusable for up to 6 weeks if lid has been correctly fitted</div> <div><div>✓</div>Elastomeric: permanently flexible</div>	<div><div>✓</div>Bonding many types of timber flooring</div> <div><div>✓</div>Suitable for floors with under floor heating</div> <div><div>✓</div>To use in areas where movement and noise need to be absorbed</div> <div><div>✓</div>Suitable for over joist applications</div> <div><div>✓</div>Full contact bonding applications where a water and solvent free adhesive is required</div>



Specifications
Cured State Rigid – Slightly flexible
Typical film thickness Up to 10mm trowel
Skin time 70 minutes (25°C, 50% RH)
Cure time 2mm/day
Area Interior / Exterior
Product Chemistry MS polymer
Refer to TDS for additional technical information.

Available products	colour	carton qty
 <div>Floor Bond XMS™ Timber Flooring Adhesive 800g sausage Resource code: 7036334237</div>	 brown	20
 <div>Floor Bond XMS™ Timber Flooring Adhesive 16kg pail Resource code: 7026901513</div>	 brown	1

Compatible Substrates
<div><div>✓</div>Wood</div> <div><div>✓</div>Steel</div> <div><div>✓</div>Fibreglass</div> <div><div>✓</div>Aluminium</div> <div><div>✓</div>Particleboard</div> <div><div>✓</div>MDF</div> <div><div>✓</div>Concrete</div> <div><div>✓</div>Ceramic</div> <div><div>✓</div>Brick</div> <div><div>✓</div>Cement render</div>





Floor Seal Epoxy™ Sealant

Floor Seal Epoxy™ sealant is a two component, water based, epoxy moisture sealer, for use over old or new concrete. Floor Seal Epoxy™ provides strong adhesion with the convenience of water clean up. Floor Seal Epoxy™ Sealant is suitable for coating concrete prior to laying flooring with Floor Bond XMS™ Timber Flooring Adhesive to prevent moisture problems.

Key Benefits	Uses
<div><div>✓</div>Simple 1:1 mixing ratio</div> <div><div>✓</div>Excellent adhesion to concrete</div> <div><div>✓</div>Water clean up</div> <div><div>✓</div>Can be used on old or new surfaces</div> <div><div>✓</div>Easy to apply using a brush, roller or spray</div>	<div><div>✓</div>Coating over old or new concrete (ensure min. 7 days after pouring concrete)</div> <div><div>✓</div>Prior to laying flooring with Floor Bond XMS™ Timber Flooring Adhesive to prevent moisture problems</div>



Specifications
Cured State Rigid – Firm
Typical film thickness 300 microns (Dry Film Thickness)
Skin time Potlife – 60 minutes Re-Coat – 2 Hours (25°C, 50% RH)
Cure time Allow 24 hours before applying adhesive and flooring (25°C, 50% RH)
Area Interior / Exterior
Product Chemistry Epoxy
Refer to TDS for additional technical information.

Available products	colour	carton qty
 <div>Floor Seal Epoxy™ Sealant 10L Epoxy Part A Resource code: 7030211513</div>	 clear	1
 <div>Floor Seal Epoxy™ Sealant 10L Epoxy Part B Resource code: 7030221513</div>	 clear	1

Compatible Substrates
<div><div>✓</div>Concrete</div>







Easy Tile™ Tiling Adhesive

Easy Tile™ is a pre-mixed, water based tile adhesive for interior use. **Easy Tile™** sets quickly, has good water resistance and is designed for use with all ceramic tiles (except high lugged floor tiles).

Key Benefits	Uses
<div><div>✓</div>Double duty - suitable for walls and floors</div> <div><div>✓</div>Ready to use: no mixing</div> <div><div>✓</div>Ammonia free formula</div> <div><div>✓</div>Excellent initial grab prevents tiles slipping from position</div> <div><div>✓</div>Water resistant</div> <div><div>✓</div>Flexible and resistant to cracking and vibration</div>	<div><div>✓</div>For residential floors in light foot traffic areas and walls</div> <div><div>✓</div>Bench tops in bathrooms, kitchens and laundries</div> <div><div>✓</div>Note: not for use over water proof membranes</div>



Specifications
Cured State Rigid
Typical film thickness 3 and 6mm trowels
Skin time 30 - 40 minutes (25°C, 50% RH)
Cure time 24 - 48 hours depending on conditions
Coverage 3mm Trowel – ca. 1.1m²/L 6mm Trowel – ca. 0.9m²/L
Area Interior
Product Chemistry Acrylic
Refer to TDS for additional technical information.

Available products		colour	carton qty
	Easy Tile™ Tiling Adhesive 500mL tub Resource code: 6030454021		white12
	Easy Tile™ Tiling Adhesive 1L tub Resource code: 6030454105		white12
	Easy Tile™ Tiling Adhesive 4L pail Resource code: 6030454020		white1

Compatible Substrates
<div><div>✓</div>Cement render</div> <div><div>✓</div>Cured concrete & plaster</div> <div><div>✓</div>Particleboard</div> <div><div>✓</div>Gypsum plasterboard</div> <div><div>✓</div>Firmly secured marine grade plywood</div>



WPM 300™ Water Proofing Membrane

WPM 300™ Water Proofing Membrane is a water clean up, water proofing membrane designed principally for wet areas. **WPM 300™** contains reinforcing micro-fibres to provide greater resistance to cracking or tearing under the stress of normal structural movement.

Key Benefits	Uses
<div><div>✓</div>Water proof – withstands constantly wet conditions</div> <div><div>✓</div>Permanently flexible - resists cracking</div> <div><div>✓</div>Low odour and non toxic</div> <div><div>✓</div>Micro-fibre reinforced</div> <div><div>✓</div>UV resistant: will resist deterioration if exposed to external conditions</div>	<div><div>✓</div>Shower recess</div> <div><div>✓</div>Laundries</div> <div><div>✓</div>Plant room floors and planter boxes</div> <div><div>✓</div>Decks & balconies</div>



Specifications
Specific gravity 1.25
Skin time 15 - 30 minutes at 22°C, 60% RH
Cure time 6 - 8 hours at 22°C, 60% RH
Coverage Internal Floors – 1.5m²/L to give 1mm DFT (Dry Film Thickness). Internal Walls – 2 - 3m²/L to give 0.3mm DFT. General Use – 1.25 - 1.5m²/L to give minimum 1mm DFT
Service temperature (°C) -10 to 80
Paintable Yes with suitable top coats
Trafficable Yes with suitable top coats
Area Interior / Exterior
Product Chemistry Synthetic Rubber
Refer to TDS for additional technical information.

Available products		colour	carton qty
	WPM 300™ Water Proofing Membrane 4L can Resource code: 6004954020		grey1

Compatible Substrates
<div><div>✓</div>Concrete</div> <div><div>✓</div>Fibre cement</div> <div><div>✓</div>Brick</div> <div><div>✓</div>Plasterboard</div> <div><div>✓</div>Cement render</div> <div><div>✓</div>Tile underlay</div> <div><div>✓</div>Aluminium</div> <div><div>✓</div>Masonry</div>

Fire rated

Advanced fire rated products designed with superior strength and durability to work when it counts.



1000s Fire rated

1020
Firesound™
Fire Rated
Acoustic
Sealant
Page 60



1050
Fula Foam™
Fire Resistant
Expanding Foam
Page 61





Firesound™ Fire Rated Acoustic Sealant

Firesound™ is formulated primarily to perform as a barrier to the incursion of fire through expansion joints and wall penetrations such as pipes or cables. Firesound™ is also an effective acoustic sealant.

Key Benefits









- ✓ Fire rating for gaps up to 50mm
- ✓ Up to 4 hour fire rating (AS1530.4-2005)
- ✓ Excellent acoustic properties (STC 65)
- ✓ Good flexibility; +/- 20% joint movement capability
- ✓ Paintable
- ✓ Intumescent; expands when exposed to fire or extreme heat.

Consult a fire engineer before use in a fire rated application

Uses

- ✓ Sealing exterior and interior construction joints that are subject to movement (up to +/- 20%) in pre-cast concrete panels, block work and brickwork
- ✓ Gaps around cables, metal pipes, conduits, busways and ducts that penetrate walls, floors and ceilings
- ✓ If joint movement is not required, Firesound can be used as a putty for filling holes in fire rated substrates
- ✓ Refer to page 98 for Recommended Joint Configurations

Specifications
Joint Widths Covered 10mm x 10mm to 50mm x 25mm max
Movement Capability (+/-) 20%
Skin time 15 minutes (25°C, 50% RH)
Cure time Variable dependant on condition
Paintable Yes
Area Interior / Exterior (protect from water until sufficiently cured)
Fire rated Yes
Product Chemistry Acrylic
Refer to TDS for additional technical information.

Available products		colour	carton qty
	Firesound™ Fire Rated Acoustic Sealant 450g cartridge Resource code: 6025914042	 grey	20
	Firesound™ Fire Rated Acoustic Sealant 600mL sausage Resource code: 6026194133	 grey	15
	Firesound™ Fire Rated Acoustic Sealant 600mL sausage Resource code: 6011944132	 white	15
	Firesound™ Fire Rated Acoustic Sealant 10L pail Resource code: 6011741513	 grey	1

Compatible Substrates
✓ Concrete
✓ Plasterboard
✓ Mortar
✓ Aluminium
✓ Steel
✓ Cable coverings (PVC)



Fula Foam™ Fire Resistant Expanding Foam

Fula Foam™ Fire Resistant Expanding Foam will fill cavities, is fire resistant for up to 3.5 hours and provides high acoustic insulation. Fula Foam™ Fire Resistant will not shrink when cured and will provide an airtight seal, and can be cut, sanded, plastered or painted.

Key Benefits



- ✓ Fire resistant polyurethane expanding foam (Tested to AS1530.4 and AS4072-1992)
- ✓ Efficient seal against smoke
- ✓ High bond strength
- ✓ High thermal and acoustic insulation
- ✓ Does not contain CFC's or H-CFC's

Consult a fire engineer before use in a fire rated application

Uses

- ✓ Fire resistant installation of window and door frames
- ✓ Fire and smoke resistant sealing of connections between partition walls, ceilings and floors
- ✓ Filling of cavities
- ✓ Applications where fire resistant characteristics are required such as:
 - Sealing of all openings in roof constructions
 - Sealing of cable and pipe penetrations
 - Creation of a sound-proof screen
 - Bonding of insulation materials
 - Application of sound-deadening layers
 - Improving thermal insulation in cold store areas

Specifications
Joint Widths Covered N/A
Movement Capability (+/-) N/A
Skin time 10 minutes (20°C, 50% RH)
Cure time A 30mm bead will reach Full Cure in 2 hours (25°C, 50% RH)
Paintable Yes
Area Interior / Exterior (if painted)
Fire rated Yes
Product Chemistry Polyurethane
Refer to TDS for additional technical information.

Available products		colour	carton qty
	Fula Foam™ Fire Resistant Expanding Foam 500g can Resource code: 7011954084	 pink	12

Compatible Substrates
✓ Concrete
✓ Wood
✓ Mortar
✓ Plasterboard
✓ Fibreglass
✓ Cement sheet
✓ MDF
✓ Particleboard
✓ Steel
✓ Aluminium

Multi Use

Every project is different, so make sure you've got the right tool for the job every time with our range of Multi Use products.



Tool Box™ MS Adhesive & Sealant

Tool Box™ is an MS polymer, moisture curing adhesive and sealant in one that cures to form a tough, water resistant seal. Tool Box™ adheres to a wide variety of materials and is a true 'tool box' in a cartridge.

Key Benefits

- ✓ Sticks and seals just about anything
- ✓ Interior / Exterior
- ✓ Paintable with most water-based paints
- ✓ Rapid skinning and curing
- ✓ Non toxic; isocyanate and solvent free
- ✓ Resistant to salt and chlorinated water
- ✓ Mould resistant

Uses

- ✓ Sealing lap joints in box guttering
- ✓ Sealing air conditioning ducts
- ✓ Adhesive for fixing wall panels to studs, floor boards to joists
- ✓ Re-fixing loose ceramic tile
- ✓ Adhering and sealing acrylic/ABS shower units
- ✓ Adhering end-caps to retaining walls
- ✓ Sealing gaps and expansion joints in concrete, brick, mortar, metal and stonework



Specifications
Joint Widths Covered 10mm to 30mm max
Movement Capability (+/-) 20%
Skin time 10 - 15 minutes (22°C, 50% RH)
Cure time 2 - 3mm/day (25°C, 50% RH)
Mould and Mildew Resistance Yes
Paintable Yes
Trafficable Yes
Area Interior / Exterior
Product Chemistry MS polymer
Refer to TDS for additional technical information.

Available products	colour	carton qty
 Tool Box™ MS Adhesive & Sealant 400g cartridge Resource code: 7029764250	 white	12
 Tool Box™ MS Adhesive & Sealant 400g cartridge Resource code: 7029774250	 grey	12
 Tool Box™ MS Adhesive & Sealant 400g cartridge Resource code: 7063564250	 black	12
 Tool Box™ MS Adhesive & Sealant 500mL sausage Resource code: 7052624237	 white	20
 Tool Box™ MS Adhesive & Sealant 500mL sausage Resource code: 7052614237	 grey	20
 Tool Box™ MS Adhesive & Sealant 500mL sausage Resource code: 7367504237	 black	20

Compatible Substrates
✓ Aluminium
✓ Ceramic
✓ Glass
✓ Steel
✓ Galvanized iron
✓ Polystyrene
✓ Plasterboard
✓ Cement render
✓ Timber
✓ Many plastics (pre-test)
✓ Fibreglass

Caulk in Colours Acrylic Sealant

Caulk in colours acrylic sealant is a flexible, water based joint sealant for use in sealing expansion and other joints in residential construction work and tiling. It can be used for interior and exterior jobs and as it dries “true” to its wet colour it won’t crack, peel or split over time.

Key Benefits	Uses
<div><div>✔</div>Contains Ultra-Fresh - enhanced mould and mildew prevention</div> <div><div>✔</div>The premium, market leading caulk sealant</div> <div><div>✔</div>Dries ‘true’ to wet colour</div> <div><div>✔</div>Won’t crack, peel or split over time</div> <div><div>✔</div>Good for horizontal and vertical applications</div> <div><div>✔</div>Flexible: +/- 20% joint movement capability</div>	<div><div>✔</div>Sealant in wet areas where immersion does not occur</div> <div><div>✔</div>Filling gaps between baths, basins, shower hobs and tiles</div> <div><div>✔</div>Expansion joints in brickwork and tiles walls</div> <div><div>✔</div>Sealing around architraves, window and door frames</div> <div><div>✔</div>Expansion joints around the perimeter of timber floors</div>



Specifications	Compatible Substrates
<div><div>Movement Capability (+/-) 20%</div><div>Skin time 20 minutes (25°C, 50% RH)</div><div>Cure time 3 - 7 days Full Cure (25°C, 50% RH)</div><div>Mould and Mildew Resistance Yes</div><div>Paintable Yes</div><div>Potable Water approved No</div><div>Area Interior / Exterior</div><div>Product Chemistry Acrylic</div></div> <div>Refer to TDS for additional technical information.</div>	<div><div>✔ Plywood</div><div>✔ Concrete</div><div>✔ Cement sheeting</div><div>✔ Metal</div><div>✔ Particleboard</div><div>✔ Plasterboard</div><div>✔ Ceramic</div><div>✔ Timber</div><div>✔ Polystyrene</div></div>



Available products	colour	carton qty
<div>Caulk in Colours 450g Cartridge</div> <div>Resource code: 7001734112</div>	<div><div></div>brilliant white</div>	6
<div>Caulk in Colours 450g Cartridge</div> <div>Resource code: 6003484112</div>	<div><div></div>white</div>	6
<div>Caulk in Colours 450g Cartridge</div> <div>Resource code: 6008324112</div>	<div><div></div>light ivory</div>	6
<div>Caulk in Colours 450g Cartridge</div> <div>Resource code: 6003474112</div>	<div><div></div>vanilla</div>	6
<div>Caulk in Colours 450g Cartridge</div> <div>Resource code: 6030994112</div>	<div><div></div>fawn</div>	6
<div>Caulk in Colours 450g Cartridge</div> <div>Resource code: 6030954112</div>	<div><div></div>mocca</div>	6
<div>Caulk in Colours 450g Cartridge</div> <div>Resource code: 6031104112</div>	<div><div></div>cream</div>	6
<div>Caulk in Colours 450g Cartridge</div> <div>Resource code: 6030964112</div>	<div><div></div>terracotta</div>	6
<div>Caulk in Colours 450g Cartridge</div> <div>Resource code: 6030934112</div>	<div><div></div>earth</div>	6
<div>Caulk in Colours 450g Cartridge</div> <div>Resource code: 6003384112</div>	<div><div></div>cedar</div>	6
<div>Caulk in Colours 450g Cartridge</div> <div>Resource code: 6030944112</div>	<div><div></div>warm brown</div>	6
<div>Caulk in Colours 450g Cartridge</div> <div>Resource code: 6030924112</div>	<div><div></div>light grey</div>	6
<div>Caulk in Colours 450g Cartridge</div> <div>Resource code: 6030974112</div>	<div><div></div>charcoal</div>	6
<div>Caulk in Colours 450g Cartridge</div> <div>Resource code: 6003354112</div>	<div><div></div>black</div>	6

Caulk in Colours has been providing the trade preferred finish to projects for decades. Matched with the changing trends of tile and paint colours, Caulk in Colours is the perfect match of strength and flexibility that stands up to the test of time.

Brilliant White

White

Light Ivory

Vanilla

Fawn

Mocca

Cream

Terracotta

Earth

Cedar

Warm Brown

Light Grey

Charcoal

Black

DIY

Stick-it Adhesives

Getting the job done right, means choosing the right product for the job. Our DIY range of Adhesives is designed to take the guess work out of sticking down your next project. We've been holding Australian building sites together for generations so whether it's laying down a new subfloor, sticking your mirror up or getting the big jobs done, our DIY range is ready to assist you with every renovation and repair.



Stick-it Adhesives Overview



SubFlooring

Page 70



Wall & Ceiling

Page 71



Bathroom & Kitchen

Page 72



Multi Purpose

Page 74



Multi Purpose FAST CURE

Page 75



Outdoor

Page 76



Heavy Duty

Page 77


Stick-it SubFlooring



H.B. Fuller Adhesive – Subflooring is a synthetic rubber based adhesive formulated for excellent bond strength on most common construction materials for indoor and outdoor use. It is primarily designed for installations of timber flooring where it reduces the number of mechanical fasteners required resulting in reduced squeak associated with nail ride in the floors.

Uses	Compatible Substrates	Key Benefits
<ul style="list-style-type: none">✓ Installing particle board, fibre cement, plasterboard, plywood and strip flooring to joists✓ High bond strength and heat resistance✓ Skirting boards to walls	<ul style="list-style-type: none">PlywoodConcreteFibreglassCement sheetingMetalParticleboardPlasterboardCeramicTimber	<ul style="list-style-type: none">✓ Ready to use✓ High bond strength✓ Repositionable for up to 20 minutes✓ Reduces squeaking on floors✓ Reduces number of mechanical fasteners required

Specifications	Refer to TDS for additional technical information
Cured State	Rigid
Typical film thickness	N/A - Compressed after application
Skin time	1 - 5 minutes (25°C, 50% RH)
Cure time	Full Cure after 7 days (25°C, 50% RH)
Area	Interior / Exterior
Product Chemistry	Solvent based rubber

Available Products	colour	carton qty
H.B. Fuller Adhesive – SubFlooring 320g cartridge Resource code: 7143224199	 tan	12


Stick-it Wall & Ceiling



H.B. Fuller Adhesive – Wall & Ceiling is a water based product that is easy to use and easy to clean. It grabs fast with excellent bonding power and is designed not to sag or slump, so where it sticks is where it stays, just what you need for walls and ceilings.

Uses	Compatible Substrates	Key Benefits
<ul style="list-style-type: none">✓ Bonding particleboard, plywood, fibre cement sheet, plasterboard and wall panelling to wooden and metal studs✓ Bonding skirting boards, architraves and trims to walls✓ Replacing loose tiles on walls (not recommended for floor tiles)✓ Suitable for fixing polystyrene wall panels✓ Bonding timber and other porous construction materials	<ul style="list-style-type: none">PolystyrenePlywoodConcreteFibre cementMetalParticleboardCeramic	<ul style="list-style-type: none">✓ Fast initial grab✓ Easy clean up✓ Low odour✓ Excellent bonding power

Specifications	Refer to TDS for additional technical information
Cured State	Rigid
Typical film thickness	N/A - Compressed after application
Skin time	20 minutes (25°C, 50% RH)
Cure time	Full Cure after 7 days (25°C, 50% RH)
Area	Interior
Product Chemistry	Acrylic water based

Available Products	colour	carton qty
H.B. Fuller Adhesive – Wall & Ceiling 410g cartridge Resource code: 601234466	 white	12

Stick-it Bathroom & Kitchen

The best bathrooms and kitchens are not only amazing to look at, they're long lasting and are made from quality materials, a lot like our Bathroom & Kitchen Adhesive. Whether you are installing a mirror or expanding the size of the room, our Bathroom & Kitchen Adhesive will support your every step of the way.




H.B. Fuller Adhesive – Bathroom & Kitchen has been developed for use in wet/steamy areas such as bathrooms, kitchens and laundries. Its high bond strength allows it to be used on most materials found in wet areas, even sticking mirrors to walls.

Uses

- ✓ Installing particle board, fibre cement, plasterboard, plywood and strip flooring to joists
- ✓ Bonding fibre cement sheet, plaster board and wall panelling to wooden and metal studs
- ✓ Skirting boards, architraves and trims to walls
- ✓ Mirrors to walls (not overhead)
- ✓ Replacing loose tiles on walls (not recommended for floor tiles)
- ✓ High bond strength and heat resistance

Compatible Substrates

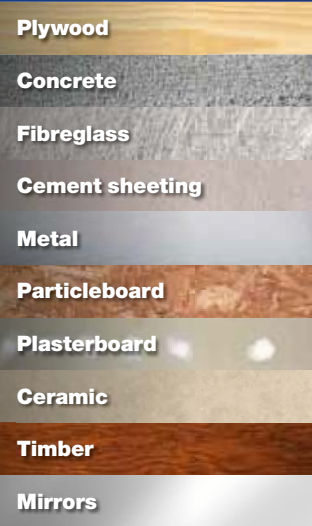

Key Benefits

- ✓ Can be used for mirrors
- ✓ High bond strength
- ✓ Repositionable for up to 20 minutes


Specifications

Refer to TDS for additional technical information

Cured State Rigid
Typical film thickness N/A - Compressed after application
Skin time 1 - 5 minutes (25°C, 50% RH)
Cure time Full Cure after 7 days (25°C, 50% RH)
Area Interior
Product Chemistry Solvent based rubber

Available Products

colour carton qty

H.B. Fuller Adhesive – Bathroom & Kitchen 320g cartridge Resource code: 7043314199	 tan	12
--	---	----



Stick-it Multi Purpose




H.B. Fuller Adhesive – Multi Purpose is ideal for bonding timber and most common construction materials including particle board, MDF board, brick, concrete, gypsum board, galvanized metal and aluminium. H.B. Fuller Adhesive – Multi Purpose is a synthetic rubber based adhesive designed primarily for installation of flooring and wall panels and can be used in many general household applications.

Uses
<ul style="list-style-type: none">✓ Installing particle board, fibre cement, plasterboard, plywood and strip flooring to joists✓ Bonding fibre cement sheet, plaster board and wall panelling to wooden and metal studs✓ Skirting boards, architraves and trims to walls✓ Replacing loose tiles on walls (not recommended for floor tiles)✓ High bond strength and heat resistance

Compatible Substrates
Concrete
Cement sheeting
Metal
Plasterboard
Timber
Fibreglass
Plywood
Particleboard
Ceramic

Key Benefits
<ul style="list-style-type: none">✓ Ready to use✓ Reduces squeaking✓ High bond strength✓ Ideal for bonding general building materials

Specifications	Refer to TDS for additional technical information
Cured State	Rigid
Typical film thickness	N/A - Compressed after application
Skin time	1 - 5 minutes (25°C, 50% RH)
Cure time	Full Cure after 7 days (25°C, 50% RH)
Area	Interior / Exterior
Product Chemistry	Solvent based rubber

Available Products	colour	carton qty
H.B. Fuller Adhesive – Multi Purpose 320g cartridge Resource code: 6028454011	 light tan	12

Stick-it Multi Purpose FAST CURE



H.B. Fuller Adhesive – Multi Purpose Fast Cure is a versatile easy to use water based adhesive that is fast, strong and reliable. Its high initial aggressive grab and high bond strength makes it ideal for project around the home particularly when time is of the essence.

Uses
<ul style="list-style-type: none">✓ Bonding particleboard, plywood, fibre cement and strip flooring to joists✓ Bonding skirting boards, architraves and trims to walls✓ Replacing loose tiles on walls (not recommended for floor tiles)✓ Suitable for fixing polystyrene wall panels✓ For bonding timber and other porous construction materials

Compatible Substrates
Concrete
Cement sheeting
Metal
Plasterboard
Timber
Plywood
Particleboard
Ceramic
Polystyrene

Key Benefits
<ul style="list-style-type: none">✓ Fast initial grab✓ Easy clean up✓ Low odour✓ High bond strength

Specifications	Refer to TDS for additional technical information
Cured State	Rigid
Typical film thickness	N/A - Compressed after application
Skin time	20 minutes (25°C, 50% RH)
Cure time	Full Cure 90% in 24 hours
Area	Interior / Exterior
Product Chemistry	Acrylic water based

Available Products	colour	carton qty
H.B. Fuller Adhesive – Multi Purpose FAST CURE 420g cartridge Resource code: 6020684473	 natural wood	12

Stick-it Outdoor



H.B. Fuller Adhesive – Outdoor is a high performance product which cures to form a tough, elastic and weather proof finish. Not matter whatever the weather, H.B. Fuller Adhesive Outdoor is ideal for outdoor areas.

Uses	Compatible Substrates	Key Benefits
<div><div><div>✓</div></div>Adhesive for elastic bonding for exterior applications of a wide variety of construction materials</div> <div><div><div>✓</div></div>Excellent resistance to weathering and UV, resists yellowing.</div> <div><div><div>✓</div></div>Paintable with strong adhesion</div>	<div>Aluminium</div> <div>Ceramic</div> <div>Glass</div> <div>Steel</div> <div>Cement sheeting</div> <div>Timber</div> <div>Plastics</div> <div>Masonry</div> <div>Brick</div>	<div><div><div>✓</div></div>Paintable</div> <div><div><div>✓</div></div>Excellent UV resistance</div> <div><div><div>✓</div></div>Strong adhesion</div> <div><div><div>✓</div></div>Resists yellowing</div>

Specifications	Refer to TDS for additional technical information
Cured State	Slightly flexible
Typical film thickness	N/A
Skin time	Approx. 30 minutes (25°C, 50% RH)
Cure time	Full Cure after 7 days (25°C, 50% RH)
Area	Interior / Exterior
Product Chemistry	MS

Available Products	colour	carton qty
H.B. Fuller Adhesive – Outdoor 420g cartridge Resource code: 7029764405	<div><div><div></div></div>white</div>	12

Stick-it Heavy Duty



H.B. Fuller Adhesive – Heavy Duty is an adhesive designed for high performance, demanding applications and heavy materials. It has been designed to work on the jobs that are too big for any other product. Its ease of use and professional strength makes it perfect for all the big jobs around the home giving a long lasting and moisture resistant bond.

Uses	Compatible Substrates	Key Benefits
<div><div><div>✓</div></div>Bonding particleboard, plywood, fibre cement and strip flooring to joists</div> <div><div><div>✓</div></div>Bonding fibre cement sheet, plasterboard and wall panelling to wooden and metal studs</div> <div><div><div>✓</div></div>Bonds skirting boards, architraves and trims to walls</div> <div><div><div>✓</div></div>Replacing loose tiles on walls (not recommended for floor tiles)</div>	<div>Concrete</div> <div>Cement sheeting</div> <div>Metal</div> <div>Plasterboard</div> <div>Timber</div> <div>Fibreglass</div> <div>Plywood</div> <div>Particleboard</div> <div>Ceramic</div>	<div><div><div>✓</div></div>Super strength</div> <div><div><div>✓</div></div>Water resistant</div> <div><div><div>✓</div></div>Bonds damp timber</div> <div><div><div>✓</div></div>Guns out easy in the cold</div> <div><div><div>✓</div></div>Paintable once fully cured</div>

Specifications	Refer to TDS for additional technical information
Cured State	Rigid
Typical film thickness	N/A - Compressed after application
Skin time	5 - 10 minutes (25°C, 50% RH)
Cure time	Full Cure after 7 days (25°C, 50% RH)
Area	Interior / Exterior
Product Chemistry	Solvent based rubber

Available Products	colour	carton qty
H.B. Fuller Adhesives – Heavy Duty 350g cartridge Resource code: 6028474199	<div><div><div></div></div>brown</div>	12

Seal-it Sealants

When sealing your home from the elements both inside and out, your project needs to stand up to all that daily life can throw at it. From sealing your project from mould in the bathroom, to protecting your roof joints from the harsh Australian sun, our sealants have been tested by the Australian trade market and are now available for your projects around the house. Have the peace of mind that you've got the right sealant for the job with our DIY range, proven to keep working well after you've finished.



Seal-it Sealants Overview



Bathroom & Kitchen
Page 80



Window & Glass
Page 81



Roof & Gutter
Page 82



Outdoor
Page 84



Multi Purpose
Page 85



Heavy Duty
Page 86



All in 1
Adhesive / Sealant / Filler
Page 89

Seal-it Bathroom & Kitchen



H.B. Fuller Sealant – Bathroom & Kitchen can be used on most common substrates found in bathroom, kitchens and laundries. It provides not only a waterproof seal but also excellent durability, flexibility and adhesion in hot and humid environments whilst being mould and mildew resistant.

Uses

- ✓ Sealing and waterproofing around sinks and other plumbing fixtures
- ✓ Sealing around shower screens and bases
- ✓ Sealing around bathtubs and spas
- ✓ Sealing and weather proofing sanitary ware

Compatible Substrates



Key Benefits

- ✓ Seals water tight
- ✓ Sinks
- ✓ Bath tubs
- ✓ Plumbing fixtures
- ✓ Mould resistant
- ✓ Mildew resistant



Specifications

Refer to TDS for additional technical information

Cured State Flexible
Movement Capacity +/- 25%
Skin time 5 - 10 minutes (25°C, 50% RH)
Cure time Full Cure after 7 days (25°C, 50% RH)
Area Interior / Exterior
Product Chemistry Neutral cure silicone

Available Products

colour carton qty

H.B. Fuller Sealant – Bathroom & Kitchen 300g cartridge Resource code: 6032034292		white	12
H.B. Fuller Sealant – Bathroom & Kitchen 300g cartridge Resource code: 6032074292		translucent	12

Seal-it Window & Glass



H.B. Fuller Sealant – Window & Glass has a high level of flexibility making it ideal for sealing around your windows, skylights, glass partitions and many other applications. It is non corrosive, weather and UV resistant so it can be used indoor or outdoor to ensure you get the tightest seal for all jobs.

Uses

- ✓ Glass partitions
- ✓ Sealing glass block structures
- ✓ Glazing and waterproofing of skylights
- ✓ Sealing laminated glass
- ✓ Non structural weather sealing of curtain wall facades
- ✓ Sealing roofs, gutters, tanks and silos
- ✓ Sealing and insulating of electrical services

Compatible Substrates



Key Benefits

- ✓ UV & weather resistant
- ✓ Easy to use
- ✓ Fast skinning

Specifications

Refer to TDS for additional technical information

Cured State Flexible
Movement Capacity +/- 20%
Skin time 3 - 7 minutes (25°C, 50% RH)
Cure time Full Cure after 7 days (25°C, 50% RH)
Area Interior / Exterior
Product Chemistry Neutral cure silicone

Available Products

colour carton qty

H.B. Fuller Sealant – Window & Glass 300g cartridge Resource code: 7359767292		translucent	12
---	---	-------------	----

Seal-it Roof & Gutter













H.B. Fuller Sealant – Roof & Gutter is UV and weather resistant for outdoor roof, gutter and plumbing projects. With colours designed to be used in conjunction with the Colorbond® roofing range ensuring you get a hard working, professional finish to your home.

Uses	Compatible Substrates	Key Benefits
<div><div><div><div><div><div></div></div></div><div><div><div></div></div></div></div><div>Sealing and weather proofing roofing, guttering, flashing, skylights, wall cladding, concrete, downpipes</div></div><div><div><div><div><div><div></div></div></div><div><div><div></div></div></div></div><div>PVC plastic fittings</div></div><div><div><div><div><div><div></div></div></div><div><div><div></div></div></div></div><div>Non corrosive</div></div><div><div><div><div><div><div></div></div></div><div><div><div></div></div></div></div><div>Sealing flange connections on water tanks</div></div></div></div></div></div>	<div><div><div><div><div></div></div></div><div>Steel</div></div><div><div><div><div><div></div></div></div><div>Aluminium</div></div><div><div><div><div><div></div></div></div><div>Galvanised iron</div></div><div><div><div><div><div></div></div></div><div>Masonry</div></div><div><div><div><div><div></div></div></div><div>Ceramic tiles</div></div><div><div><div><div><div></div></div></div><div>Terracotta</div></div><div><div><div><div><div></div></div></div><div>Lead</div></div><div><div><div><div><div></div></div></div><div>Zincalume</div></div><div><div><div><div><div></div></div></div><div>Glass</div></div><div><div><div><div><div></div></div></div><div>Plastics (pre-test)</div></div><div><div><div><div><div></div></div></div><div>Fibreglass</div></div></div></div></div></div></div></div></div></div></div></div></div>	<div><div><div><div><div><div></div></div></div><div><div><div></div></div></div></div><div>‘Colour’ suitable for use with Colorbond® ‘Colour’</div></div><div><div><div><div><div><div></div></div></div><div><div><div></div></div></div></div><div>Sealing & weatherproofing roofs & gutters</div></div><div><div><div><div><div><div></div></div></div><div><div><div></div></div></div></div><div>Skylights & flashings</div></div><div><div><div><div><div><div></div></div></div><div><div><div></div></div></div></div><div>UV & weather resistant</div></div><div><div><div><div><div><div></div></div></div><div><div><div></div></div></div></div><div>Safe with drinking water*</div></div></div></div></div></div></div>
Specifications		
Refer to TDS for additional technical information		
Cured State Flexible		
Movement Capacity +/- 25%		
Skin time 15 - 25 minutes (25°C, 50% RH)		
Cure time Full Cure after 7 days (25°C, 50% RH)		
Area Interior / Exterior		
Product Chemistry Neutral cure silicone		



As your roof protects you from the harsh Australian environment, H.B. Fuller Roof & Gutter silicone stands up to the same test with its enhanced flexibility and weatherproofing joint sealing. Our Roof & gutter range has been designed to be used with Colorbond®. So it can blend in seamlessly with the elegant look of the fascia of your home.

Available products	colour	carton qty
H.B. Fuller Sealant – Roof & Gutter 300g cartridge Resource code: 7377434292	 black	6
H.B. Fuller Sealant – Roof & Gutter 300g cartridge Resource code: 7156194164	 light grey	6
H.B. Fuller Sealant – Roof & Gutter 300g cartridge Resource code: 7359764292	 translucent	6
H.B. Fuller Sealant – Roof & Gutter 300g cartridge Resource code: 7156094164	 cream	6
H.B. Fuller Sealant – Roof & Gutter 300g cartridge Resource code: 7156104164	 tan	6
H.B. Fuller Sealant – Roof & Gutter 300g cartridge Resource code: 7156114164	 dark grey	6
H.B. Fuller Sealant – Roof & Gutter 300g cartridge Resource code: 7156134164	 blue	6
H.B. Fuller Sealant – Roof & Gutter 300g cartridge Resource code: 7156144164	 beige	6
H.B. Fuller Sealant – Roof & Gutter 300g cartridge Resource code: 7156084164	 off white	6
H.B. Fuller Sealant – Roof & Gutter 300g cartridge Resource code: 7156124164	 green	6

Black
Suitable for use with Colorbond® Night Sky

Light Grey
Suitable for use with Colorbond® Shale Grey

Translucent
Suitable for use with Colorbond® All Colours

Cream
Suitable for use with Colorbond® Classic Cream

Tan
Suitable for use with Colorbond® Dune

Dark Grey
Suitable for use with Colorbond® Woodland Grey

Blue
Suitable for use with Colorbond® Deep Ocean

Beige
Suitable for use with Colorbond® Paperbark

Off White
Suitable for use with Colorbond® Surfmist

Green
Suitable for use with Colorbond® Cottage Green

® Colorbond® is a registered trademark of BlueScope Steel Limited.

Seal-it Outdoor



H.B. Fuller Sealant – Outdoor can be used as your first line of defence against leakage. Its high level of flexibility and acceptance for unexpected movement, makes it an ideal sealant for all your outdoor jobs, where durability and longevity across a vast temperature range is required.

Uses

- ✓ Silicone sealant to repair and seal brickwork
- ✓ Expansion joints in masonry
- ✓ Repairs around patios
- ✓ Repair and seal driveways

Compatible Substrates



Key Benefits

- ✓ Neutral cure
- ✓ Excellent resistance to UV & weather
- ✓ Brickwork
- ✓ Masonry
- ✓ Driveways


Specifications

Refer to TDS for additional technical information

Cured State Flexible
Movement Capacity +/- 25%
Skin time 15 - 25 minutes (25°C, 50% RH)
Cure time Full Cure after 7 days (25°C, 50% RH)
Area Interior / Exterior
Product Chemistry Neutral cure silicone

Available Products

colour carton qty

H.B. Fuller Sealant – Outdoor 400g cartridge Resource code: 7071864406		grey	12
--	---	------	----

Seal-it Multi Purpose




H.B. Fuller Sealant – Multi Purpose can be used in a wide variety of applications inside and outside the home due to its excellent strength and adhesion to many materials. Its tough long lasting seal protects against the elements outside and the variable chemicals inside. For all the jobs around the home Multi Purpose will get the job the done.

Uses

- ✓ Sealing lap joints
- ✓ Sealing air-conditioning ducts
- ✓ Multiple high performance sealing applications
- ✓ Sealing acrylic / ABS shower units
- ✓ Sealing gaps and expansion joints in concrete, brick, mortar, metal and stonework

Compatible Substrates

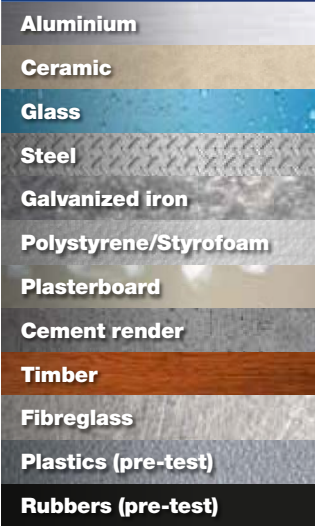

Key Benefits

- ✓ Paintable
- ✓ Resistant to salt & chlorinated water
- ✓ Interior / exterior
- ✓ High UV resistance

Specifications

Refer to TDS for additional technical information

Cured State Flexible
Movement Capacity +/- 20%
Skin time 10 - 15 minutes (25°C, 50% RH)
Cure time Full Cure after 7 days (25°C, 50% RH)
Area Interior / Exterior
Product Chemistry MS

Available Products

colour carton qty

H.B. Fuller Sealant – Multi Purpose 400g cartridge Resource code: 7029764410		white	12
H.B. Fuller Sealant – Multi Purpose 400g cartridge Resource code: 7029774410		grey	12

Seal-it Heavy Duty



H.B. Fuller Sealant – Heavy Duty is the product to use when you need the heavy duty protection for those really tough jobs both inside and outside the home. Its high performance and strength will give an impenetrable seal and resist every day wear and tear.

Uses

- ✓ Sealing expansion and control joints in tiling, walls, roofs, wall, door and window frame perimeters, cladding and brickwork
- ✓ In applications where a level of chemical resistance is required.
- ✓ In seals where acoustic properties are required

Compatible Substrates

Concrete
Cement sheeting
Ceramic
Masonry
Plastics (pre-test)
Plasterboard
ABS
Steel
Aluminium
Timber
Glass

Key Benefits


- ✓ Remains flexible
- ✓ Roofs
- ✓ Door & window frames
- ✓ UV & weather resistant
- ✓ Paintable

Specifications

Refer to TDS for additional technical information

Cured State Flexible
Typical film thickness N/A - Compressed after application
Skin time Approx. 150 minutes (25°C, 50% RH)
Cure time Full Cure after 7 days (25°C, 50% RH)
Area Interior / Exterior
Product Chemistry MS

Available Products

	colour	carton qty
H.B. Fuller Sealant – Heavy Duty 400g cartridge Resource code: 7056134406	 grey	12



Seal-it

All in 1

Adhesive, Sealant & Filler



H.B. Fuller – All in One is an adhesive, sealant and filler all in one cartridge. Its outstanding adhesion to a vast range of substrates, mould and mildew resistance and superior flexibility allows this product to be used in a wide variety of applications inside and outside the home. From Bathroom and Kitchen to Brick and Mortar, where you need to perform a variety of tasks to get the job done, all you need is H.B. Fuller – All in One.

Uses

- ✓ Sealing lap joints in box guttering
- ✓ Sealing air-conditioning ducts
- ✓ Adhesive for fixing wall panels to studs, floor boards to joists
- ✓ Refixing loose ceramic tiles
- ✓ Multiple high performance bonding and sealing applications
- ✓ Adhering and sealing acrylic/ABS shower units
- ✓ Adhering end-caps to retaining walls
- ✓ Sealing gaps and expansion joints in concrete, brick, mortar, metal and stonework

Specifications

Refer to TDS for additional technical information

Cured State Flexible
Movement Capacity +/- 20%
Skin time 10 - 15 minutes (25°C, 50% RH)
Cure time Full Cure after 7 days (25°C, 50% RH)
Area Interior / Exterior
Product Chemistry MS

Compatible Substrates

Aluminium
Ceramic
Glass
Steel
Galvanized iron
Polystyrene/Styrofoam
Plasterboard
Cement render
Timber
Fiberglass
Plastics (pre-test)

Key Benefits

- ✓ Paintable with most water based paints
- ✓ High bond strength
- ✓ Mould resistant
- ✓ Interior / Exterior

Available Products

	colour	carton qty
--	--------	------------

H.B. Fuller – All In 1 400g cartridge Resource code: 7029764473	 white	12
H.B. Fuller – All In 1 400g cartridge Resource code: 7029774473	 grey	12
H.B. Fuller – All In 1 400g cartridge Resource code: 7367504473	 black	12



Fill-it Fillers

Whether filling gaps outside the home where you need extra protection to UV, to filling small holes inside with a single application, make sure you only do the job once by doing it right with the correct product from our DIY range of fillers.



Fill-it Fillers Overview



Gaps – Indoor
Page 92



Gaps – Outdoor
Page 93



Small cracks & holes
Page 94



Large cracks & holes
Page 95

Fill-it Gaps – Indoor



H.B. Fuller Filler – Gaps Indoor can be used if you have a gap somewhere in your home, increasing the risk of draughts, moisture, or insects entering the home through the gap and causing damage or discomfort, not to mention how unsightly it can be. An easy way to seal the gaps is to use H.B. Fuller Gaps Indoor and keep what is meant to stay out, out.

Uses

- ✓ Patching gaps around skirting boards and architraves
- ✓ Patching gaps around window frames
- ✓ Patching gaps around cornices

Compatible Substrates



Key Benefits

- ✓ Remains flexible - years after use
- ✓ Tools and finishes perfectly
- ✓ Paintable
- ✓ Interior / exterior
- ✓ Water clean up
- ✓ Does not slump or sag


Specifications

Refer to TDS for additional technical information

Finish Fine
Maximum crack/hole size 25mm MAX
Skin time 15 minutes (25°C, 50% RH)
Cure time Full Cure after 7 days (25°C, 50% RH)
Sandable Yes
Area Interior / Exterior
Product Chemistry Acrylic

Available Products

colour carton qty

H.B. Fuller Filler Gaps – Indoor 450g cartridge Resource code: 6003954250		white	12
---	---	-------	----

Fill-it Gaps – Outdoor




H.B. Fuller – Gaps Outdoor is a premium flexible and durable product which can withstand exposure to the environment making it the right product to use on your outdoor projects and weatherboards. This product has been designed to expand and contract with the vast temperature extremes of the Australian environment without shrinking or cracking.

Uses

- ✓ Patching gaps around skirting boards and architraves
- ✓ Patching gaps around window frames
- ✓ Patching gaps around cornices
- ✓ Fill gaps between weatherboard panels

Compatible Substrates

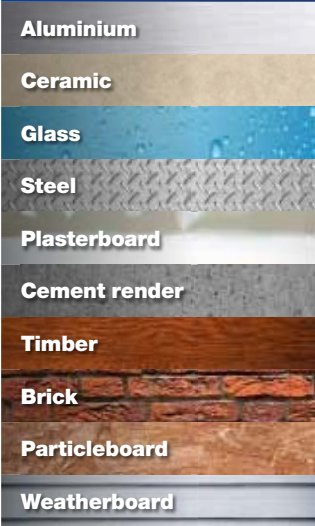

Key Benefits

- ✓ Remains flexible - years after use
- ✓ Tools and finishes perfectly
- ✓ Paintable
- ✓ Interior / exterior
- ✓ Water clean up
- ✓ Does not slump or sag


Specifications

Refer to TDS for additional technical information

Finish Fine
Maximum crack/hole size 30mm MAX
Skin time 10 - 15 minutes (25°C, 50% RH)
Cure time Full Cure after 7 days (25°C, 50% RH)
Sandable Yes
Area Exterior
Product Chemistry Acrylic

Available Products

colour carton qty

H.B. Fuller Filler Gaps – Outdoor 450g cartridge Resource code: 7154014410		white	12
--	---	-------	----

Fill-it

Small Cracks & Holes



H.B. Fuller – Small Cracks & Holes can fill cracks and gaps up to 16mm. For those small quick patch ups around the house the fast cure time of this ready to use product gives a smooth sandable finish in 30 minutes. You can fill, sand and paint all within the one day to free up your time for other projects around the home.

Fill-it


Large Cracks & Holes




H.B. Fuller – Large Cracks & Holes can fill cracks and gaps up to 25mm. For the bigger holes around the home the Large Cracks and Holes is the best product to use. It can be used indoors or outdoors as it cures to have a hard, sandable finish. Once sanded you will be left with a smooth flawless look which can be easily painted over so it would be hard to notice if a hole was really there.

Uses

- ✓ Filling and patching smaller cracks, holes and gaps
- ✓ Providing a smooth surface over many substrates

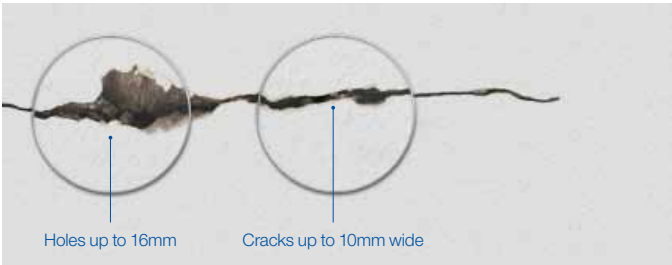

Compatible Substrates

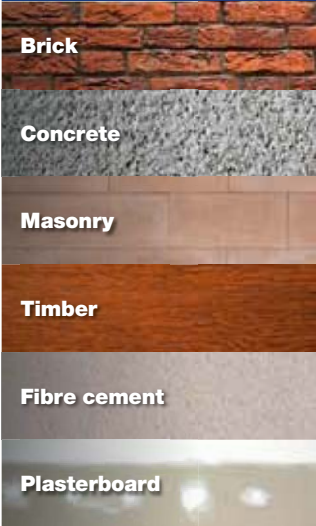

Key Benefits

- ✓ Interior / Exterior
- ✓ Paintable
- ✓ Smooth texture – ideal for internal walls
- ✓ One part – ready to use
- ✓ Sandable
- ✓ Minimal shrinkage during curing

Specifications

Refer to TDS for additional technical information

Finish Fine
Maximum crack/hole size 16mm MAX
Skin time Sandable in 30 minutes (25°C, 50% RH)
Cure time 4 - 6mm per day (25°C, 50% RH)
Sandable Yes
Area Interior / Exterior
Product Chemistry Acrylic


Available Products

colour carton qty


H.B. Fuller Filler – Small Cracks & Holes 55g tub Resource code: 7149844238		white	12
H.B. Fuller Filler – Small Cracks & Holes 130g tub Resource code: 7149844458		white	12
H.B. Fuller Filler – Small Cracks & Holes 270g tub Resource code: 7149844459		white	12

Uses

- ✓ Filling and patching large cracks, holes and gaps
- ✓ Providing a smooth surface over many substrates

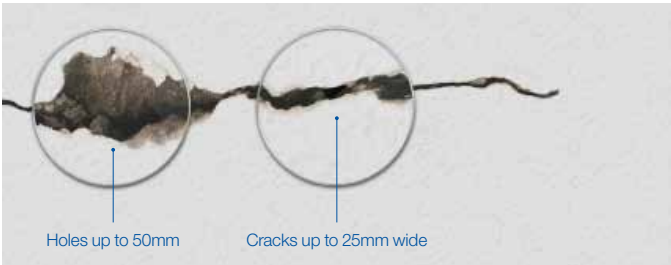

Compatible Substrates

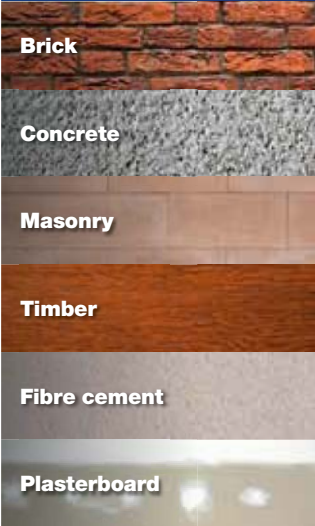

Key Benefits

- ✓ Interior / Exterior
- ✓ Paintable
- ✓ Smooth texture – ideal for internal walls
- ✓ One part – ready to use
- ✓ Sandable
- ✓ Minimal shrinkage during curing

Specifications

Refer to TDS for additional technical information

Finish Fine
Maximum crack/hole size 25mm max
Skin time Skins in 30 minutes, sandable time dependant on volume applied
Cure time 4 - 6mm per day (25°C, 50% RH)
Sandable Yes
Area Interior / Exterior
Product Chemistry Acrylic

Available Products

colour carton qty

H.B. Fuller Filler – Large Cracks & Holes 75g tub Resource code: 7152094460		white	12
H.B. Fuller Filler – Large Cracks & Holes 180g tub Resource code: 7152094461		white	12
H.B. Fuller Filler – Large Cracks & Holes 375g tub Resource code: 7152094462		white	12

Caulking, Sausage and Applicator Guns



Economy Foam Gun Silver

- ✓ All metal applicator gun
- ✓ General purpose
- ✓ Multiple use

Resource Number: 6035474365



Professional Foam Gun Black

- ✓ All metal applicator gun
- ✓ Teflon coated interior/exterior preventing foam adhering to gun, to allow for easy cleaning
- ✓ Can be disassembled and cleaned with Max Pro Cleaner

Resource Number: 6035464366



Sausage Barrel Gun

- ✓ Suitable for 500mL & 600mL sausages
- ✓ Heavy duty barrel
- ✓ Superior plunger rod
- ✓ Hard wearing clutch
- ✓ Includes 2 nozzles (Black for polyurethane & clear)

Resource Number: 6018714151



632 GTS Bulk Loading Gun

- ✓ Suitable for 300mL cartridges
- ✓ Heavy duty
- ✓ Premium quality

Resource Number: 6036024399



Little Red Caulking Gun

- ✓ Suitable for 300mL cartridges
- ✓ Heavy duty
- ✓ Premium quality

Resource Number: 6034304015



Big Red Caulking Gun

- ✓ Suitable for 900g cartridges
- ✓ Heavy duty
- ✓ Premium quality

Resource Number: 6033124016




Easy Squeeze Gun Yellow

- ✓ Suitable for 300mL cartridges


Resource Number: 6031499000

Recommended Joint Configurations


General information and instructions regarding joint sealants:

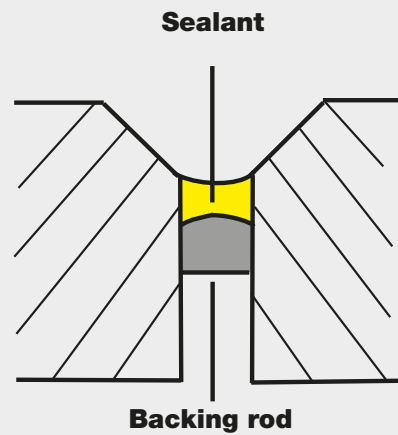


Correct
Sealant applied on backing rod using correct sealant dimensions

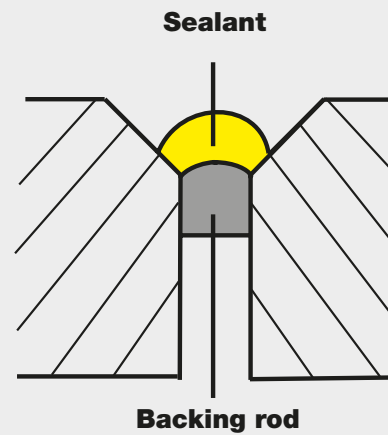


Correct
Alternative method of installation preserves ability of sealant to expand and contract

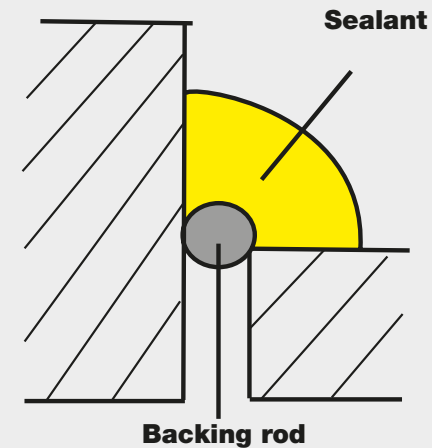


Correct
Sealant applied between two walls with backing rod to support movement

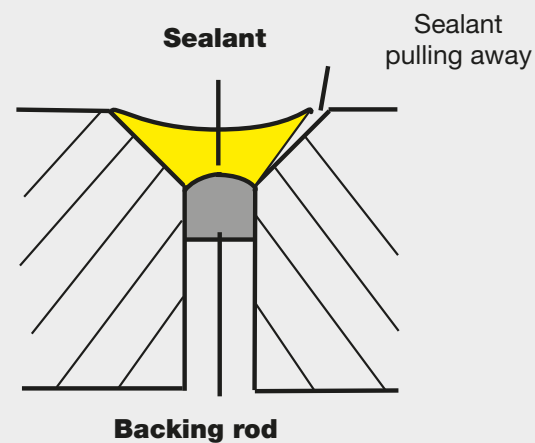

Wrong
Sealant applied onto chamfered edge where concrete may be weak

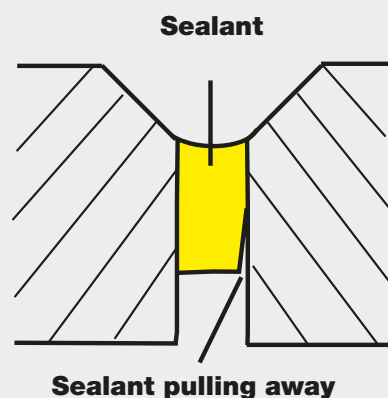

Wrong
Sealant extends too deep into joint leading to tearing away from sides or splitting

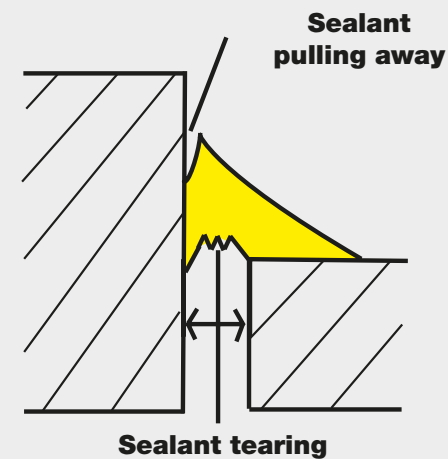

Wrong
Sealant applied without backing rod, or where excessive movement occurs, allows sealant to split away from the wall edges and tear

Surface Preparation and Priming

- Ensure substrate surfaces are clean, sound, dry and free of oil, grease, dust, loose particles, release agents, silicone and water repellents. Priming, or alternatively solvent wiping, is necessary for joints involving some substrates. Please refer to individual product technical data sheets.

Application

- Care must be taken to select the correct sealant for the joint, taking into account requirements such as paintability, UV, temperature, chemical and water resistance, non-staining ability, joint movement capability, etc.
- Sealants should be applied between MIN 5°C and MAX 35°C.
- Sides of joints may be masked with tape prior to sealant application. If masking is undertaken, remove the tape before sealant cures.
- Wear appropriate clothing to avoid sealant contact with skin and eyes.
- Before sealant application, closed cell polyethylene or open cell polyurethane foam backing rod is usually pushed between the substrates to the joint depth, in order to control sealant depth forming the joint.
- In trafficable joints where firmer support is required, non-porous, semi-rigid backing rod type materials are sometimes recommended. Seek technical advice regarding the type of backing material and detailed instructions that need to be followed.
- Select a foam width where the foam will compress approx. 25% when pushed into the gap. Where closed cell foam is used, be careful not to puncture the surface, or over-compress the foam, as this can lead to gas from the foam bubbling into the sealant – a condition that worsens in warming conditions.
- In joints too shallow for backing rod, bond-breaker tape must be applied into the gap to avoid three-sided adhesion of the sealant, which will result in the joint failing.
- After applying sealant into the joint, the sealant should be smoothed (tooled), preferably without a release agent. If a tooling agent is required, check the technical data of the sealant to ensure suitability.
- Check the sealant technical data to ensure it is suitable for the proposed joint configuration.
- In standard expansion joints, the joint should be min 6mm width.
- For joints between 6mm and 10mm width, the depth of the sealant should be the same as the width.
- For joints between 10mm and 20mm width, the depth of the sealant should be 10mm.
- For joints between 20mm and 50mm width, the depth of the sealant should be half the joint width e.g. a 30mm width joint should have a depth of 15mm.
- Joints above 50mm are not standard, and technical advice should be sought.

DIY

Selection Chart

- Excellent performance
- Possible to use

				Pack Size	Carton Quantity	Colour	Substrates																			Technical																			
							Concrete	Ceramic	Glass	Plasterboard	Plastic	Polystyrene	Paper / Fabric	Stainless Steel / Steel	Mirrors	Timber	Metal	Cement Sheeting	Fibreglass	Particleboard	Masonry	Colorbond®	Brick	MDF																					
														</																															



PROJECT

it's for...

ACTION

it has to be...

SUBSTRATES

it will be applied to...

FEATURES

and it must be...

From floor to ceiling,
we have a range of products
for all your DIY projects.

Our range of adhesives, sealants and fillers have been used in the Australian homes for generations. Not only are we trusted by the trade, we also offer the same level of quality, range and performance in our DIY products. Our easy to read labels take the confusion out of choosing the right product for your project. So whether you need to Stick it, Seal it or Fill it, think H.B. Fuller.

Trade

Selection Chart

- Excellent performance
- Possible to use

Trade Selection Chart		Substrates																			Technical											
		Aluminium	Concrete	Ceramic	Cement Sheeting	Metal	Fibreglass	Particleboard	Brick	Fibre Cement	Masonry	Glass	Plasterboard	Plastic	Polystyrene	Paper / Fabric	Stainless Steel	Mirrors	Zinc / Copper / Galvanized Steel	Timber	Product Chemistry	Skin Time at 22°C, 60% RH	Specific Gravity	Cure time at 22°C, 60% RH	Movement Capability (+/-)	Hardness (Shore A)	Clean Up	Service Temp (°C)	Paintable	Trafficable		
Adhesives	100 Max Bond™												●								Solvent based rubber	2 - 5 mins	~1.05	Variable dependant on conditions	N/A	N/A	Mineral turpentine or solvent	-10 to 80	Yes	N/A		
	120 Max Bond™ Fast Grip													●							Acrylic	20 mins	~1.4	Variable dependant on conditions	N/A	N/A	Water	-5 to 90	Yes	N/A		
	140 Max Bond™ Rapid Cure												●	●							Polyurethane	5 mins	~1.16	1 hr clamping time, full cure 7 days	N/A	N/A	Mineral turpentine	-30 to 100	Yes	No		
	103 Fulaprene												●								Solvent based rubber	2 - 5 mins	~1.0	Variable dependant on conditions	N/A	0	Mineral turpentine or solvent	-10 to 80	Yes	N/A		
	201 Spray Bond™ Permanent				●								●								Chloroprene based solvent	5 - 10 mins	N/A	Instant	N/A	N/A	Mineral turpentine	0 to 50	Yes	N/A		
	202 Spray Bond™ Removable												●								Chloroprene based solvent	5 - 10 mins	N/A	Instant	N/A	N/A	Mineral turpentine	0 to 50	Yes	N/A		
	203 Rapid Grip™ Liquid												●								Solvent based rubber	15 mins	~ 0.83	Instant	N/A	N/A	Mineral turpentine	0 to 50	Yes	N/A		
	204 Rapid Grip™ Gel												●								Solvent based rubber	15 mins	~ 0.9	Instant	N/A	N/A	Mineral turpentine	0 to 50	Yes	N/A		
	220 ROCOR® Stud Adhesive																				Acrylic	20 mins	-1.4	80% in 24 hrs, full cure in 7 days	N/A	N/A	Water	-10 to 60	Yes	N/A		
	230 Max Bond™ PVA Adhesive														●						PVA	30 mins	~1.0	60 mins	N/A	N/A	Water	N/A	Yes	N/A		
	248 Max Pro Gun Cleaner																				Solvent	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	
	249 Max Bond™ Pro Gun Adhesive		●																		Polyurethane	20 - 30 mins	N/A	80% in 3 hrs, full cure in 24 hrs	N/A	N/A	Max Pro Cleaner or acetone	-40 to 90	Yes	N/A		
Fillers	320 Building Filler												●								Polyester	5 mins	~0.95	5 mins	N/A	N/A	Acetone	N/A	Yes	Yes		
	330 Max Fill™ Gap Filler																				Acrylic	10 - 20 mins	~1.65	Variable dependant on conditions	10%	N/A	Water	-85	Yes	No		
	350 Max Fill™ Expanding Foam												●								Polyurethane	10 - 15 mins	N/A	80% in 2 hrs, full cure in 24 hrs	N/A	N/A	Max Pro Cleaner or acetone	-40 to 90	Yes	No		
	351 Fula Foam™ Pro Foam																				Polyurethane	10 - 15 mins	N/A	80% in 2 hrs, full cure in 24 hrs	N/A	N/A	Max Pro Cleaner or acetone	-40 to 90	Yes	No		
	390 Trademate™ Interior Powder																				Plaster	N/A	N/A	6 hrs	N/A	N/A	Water	N/A	Yes	No		
	391 Trademate™ Exterior Powder																				Cement	N/A	N/A	6 hrs	N/A	N/A	Water	N/A	Yes	No		
Sealants	400 Max Seal™ Clear Adhesive Sealant												●	●							Rubber	5 mins	~0.90	Dependant on conditions	N/A	N/A	Mineral turpentine	-10 to 60	Yes	N/A		
	401 Ultra Clear™												●								Acrylic	10 - 20 mins	1	Dependant on conditions	25%	10	Water	-5 to 80	Yes	No		
	420 Fulaseal™																				Acrylic	10 mins	~1.5	Variable dependant on conditions	25%	15	Water	-5 to 80	Yes	No		
	560 Super Seal HPR25™												●								MS Polymer	100 - 200 mins	~1.35	2mm/day	25%	22	Mineral Turpentine	-40 to 80	Yes	No		
	561 Max Fix™ MS Adhesive Sealant												●								MS polymer	100 - 200 mins	~1.35	2mm/day	25%	22	Mineral turpentine	-40 to 80	Yes	No		
	562 Super Seal HPR50FC™												●								MS Polymer	20 mins	~1.45	2mm/day	25%	35	Mineral turpentine	-40 to 80	Yes	No		
	570 Liquid Glass												●								MS polymer	70 - 230 mins	~1.44	2mm/day	15%	55	Mineral turpentine	-40 to 80	Yes	Yes		
	Silicones	HBF 620™ High Performance Glazing											●	●				●	●			Acetic cure silicone	NA	~1.0	2 - 3mm/day	25%	20	Mineral turpentine	-50 to 180	No	No	
		HBF 300™ Premium Grade Silicone												●					●	●		Neutral cure silicone	7 mins	~1.01(Trans), 1.05(Blk), 1.27(Gry), 1.03(Wht)	2mm/day	20%	28	Mineral turpentine	-40 to 150	No	No	
		HBF 730™ RTV Adhesive and Sealant												●					●	●		RTV silicone	5 - 10 mins	~1.02	3mm/day	25%	25	Mineral turpentine	-50 to 230 (Blk) -50 to 205 (Trans)	No	No	
		HBF 260™ Heat Resistant RTV												●					●	●		RTV silicone	5 - 10 mins	~1.03	3mm/day	25%	N/A	Mineral turpentine	-65 to 312	No	No	
		660 Architecture Silicone												●					●	●		Neutral cure silicone	NA	~1.0	1 - 2mm/day	25%	28	Mineral turpentine	-60 to 180	No	No	
		Max Seal™ 700 Roof and Gutter												●					●	●		Neutral cure silicone	10 - 15 mins	~1.05 (Blk & Trans), ~1.3 (Gry)	1 - 2mm/day	25%	19 (Blk & Trans) 26 (Gry)	Mineral turpentine	-15 to 150	No	No	
		Max Seal™ 710 Glass Silicone												●					●	●		Acetic cure silicone	10 - 15 mins	~1.0	1 - 2mm/day	25%	20	Mineral turpentine	-50 to 150	No	No	
		720 Paintable MS Silicone												●					●	●		MS polymer	100 - 200 mins	~1.35	3 - 4mm/day	25%	25	Mineral turpentine	-40 to 80	Yes	No	
705 Brick & Concrete Silicone																		●	●		Neutral cure silicone	5 - 10 mins	~1.3	1 - 2mm/day	25%	26	Mineral turpentine	-15 to 150	No	No		
740 Bathroom & Kitchen Silicone													●					●	●		Acetic cure silicone	N/A	~1.0	1 - 2mm/day	25%	20	Mineral turpentine	-50 to 150	No	No		
750 Multi Purpose Silicone													●					●	●		Neutral cure silicone	NA	~1.0	1 - 2mm/day	25%	19	Mineral turpentine	-50 to 150	No	No		
Max Seal™ 760 Glazing Silicone													●	●				●	●		Neutral cure silicone	10 - 20 mins	~1.3	1 - 2mm/day	25%	26	Mineral turpentine	-50 to 150	No	No		
770 Sanitary Silicone			●										●	●				●	●	●	Neutral cure silicone	5 - 10 mins	~1.0	1 - 2mm/day	25%	15 - 20	Mineral turpentine or solvent	-50 to 150	No	No		
Max Seal™ 780 Plumbing Silicone		●										●					●	●	●	Neutral cure silicone	10 - 15 mins	~1.0 (Trans, Aluminium), ~1.3 (Gry)	1 - 2mm/day	25%	19 (Trans, Alumin) 26 (Gry)	Mineral turpentine or solvent	-50 to 150	No	No			
790 Mirror & Metal Silicone												●	●				●	●	●	Neutral cure silicone	10 - 15 mins	~1.0	1 - 2mm/day	25%	19	Mineral turpentine	-50 to 150	No	No			
Flooring	850 Floorbond XMS™												●					●			MS polymer	60 - 100 mins	~1.6	2mm/day	N/A	N/A	Mineral turpentine or solvent	-40 to 90	Yes	N/A		
	860 Floor Seal Epoxy™ Sealant Part A																				Epoxy	N/A	N/A	1 - 2 hrs	N/A	N/A	Water	N/A	N/A	N/A		
	861 Floor Seal Epoxy™ Sealant Part B																				Epoxy	N/A	N/A	1 - 2 hrs	N/A	N/A	Water	N/A	N/A	N/A		
	920 Easy Tile™																															

**Stick-it
Seal-it
Fill-it**

Fuller-it